



徐州中和重工机械有限公司
XUZHOU ZHONGHE HEAVY INDUSTRY MACHINERY CO., LTD.

锚 住 信 任
链 接 友 谊



地址：江苏省徐州市沛县安国镇工业园区

电话：0516-89991792

传真：0516-89689556

内贸手机：+86 13626170961

+86 17312879789

外贸手机：+86 15996898696

+86 18658226303

国内网址：www.xzqkks.com

国外网址：www.cnanchorchain.com

邮箱：sales@xuzhouzhonghe.com

judy@xuzhouzhonghe.com

Add Angguo Town Industrial Zone, Peixian

Xuzhou, Jiangsu Province, China

Tel: 0516-89991792

Fax: 0516-89689556

Domestic Trade Mobile: +86 13626170961

+86 17312879789

Foreign Trade Mobile: +86 15996898696

+86 18658226303

Web: www.xzqkks.com

Web: www.cnanchorchain.com

E-mail: sales@xuzhouzhonghe.com

judy@xuzhouzhonghe.com



徐州中和重工机械有限公司

XUZHOU ZHONGHE HEAVY INDUSTRY MACHINERY CO., LTD.



徐州中和重工机械有限公司

XUZHOU ZHONGHE HEAVY INDUSTRY MACHINERY CO., LTD.

公司介绍

徐州中和重工机械有限公司是一家专业生产船用锚和船用链条的企业，至今已有二十年的历史。

公司坐落在交通便利的徐州，占地面积4万平方米，现有员工200人，其中工程师10人，专业技术人员30人，公司拥有4000KN船用锚拉力试验等先进设备，产品按照国际先进技术标准生产，检测设备齐全。

公司拥有较强的设计，制造，实验和销售船用产品的能力。主要对船用锚，船用链条，船用舾装件和船用配件等船用产品进行制造及销售。

其中，船用锚产品有20多个系列，600多种型号（50-20000KG）。链条有各种等级的有档链条和无档链条，主要适应于船舶，矿用，牵引，捆扎及下坠。我们公司产品畅销国内外，受到广大客户的一致好评。

我公司可以经营并提供中国船舶检验局（ZC）证书、CCS证书、LR证书、GL证书、ABS证书、KR证书、RINA证书、DNV证书、NK证书、BV证书。并且具有提供标准船用锚和船用链条的能力。

徐州中和重工机械有限公司始终坚持“质量第一，用户至上”的宗旨，我们会在工作中不断改进提高我们的技术水平，规范内部管理，以最大的能力满足市场及客户的需求。徐州中和重工机械有限公司全体员工期待您的到来与联系。

Company Introduction

Xuzhou Zhonghe Heavy Industry Machinery Co., Ltd. is a professional manufacturer of marine anchors and marine chains, with a history of twenty years.

The company is located in Xuzhou with convenient transportation, covers an area of 40,000 square meters, and has 200 employees, including 10 engineers and 30 professional and technical personnel. The company has advanced equipment such as 4000KN marine anchor tensile test. Products are produced in accordance with international advanced technical standards and have complete testing equipment.

The company has a strong ability to design, manufacture, experiment and sell marine products. It mainly manufactures and sells marine products such as marine anchors, marine chains, marine outfitting and marine accessories.

Among them, there are more than 20 series of marine anchor products and more than 600 models (50-20000KG). The chain has studless anchor chain and stud link anchor chain, which are mainly suitable for ships, mines, traction, bundling and falling. Our company's products sell well at home and abroad, and are well received by our customers.

Our company can operate and provide China Ship Survey (ZC) certificate, CCS certificate, LR certificate, GL certificate, ABS certificate, KR certificate, RINA certificate, DNV certificate, NK certificate, BV certificate. And has the ability to supply standard marine anchors and marine chains.

Xuzhou Zhonghe Heavy Industry Machinery Co., Ltd. always adheres to the tenet of "quality first, customer first", we will continuously improve our technical level in our work, standardize internal management, and meet the needs of the market and customers with the greatest ability. All staff of Xuzhou Zhonghe Heavy Industry Machinery Co., Ltd. look forward to your arrival and contact.





徐州中和重工机械有限公司
XUZHOU ZHONGHE HEAVY INDUSTRY MACHINERY CO., LTD.



徐州中和重工机械有限公司
XUZHOU ZHONGHE HEAVY INDUSTRY MACHINERY CO., LTD.



中和

船舶配套

QIANKUN MARINE ANCHOR




跌落试验
Drop Test



出钢现场
The spot steel out from surface




拉力试验
Tensile tes

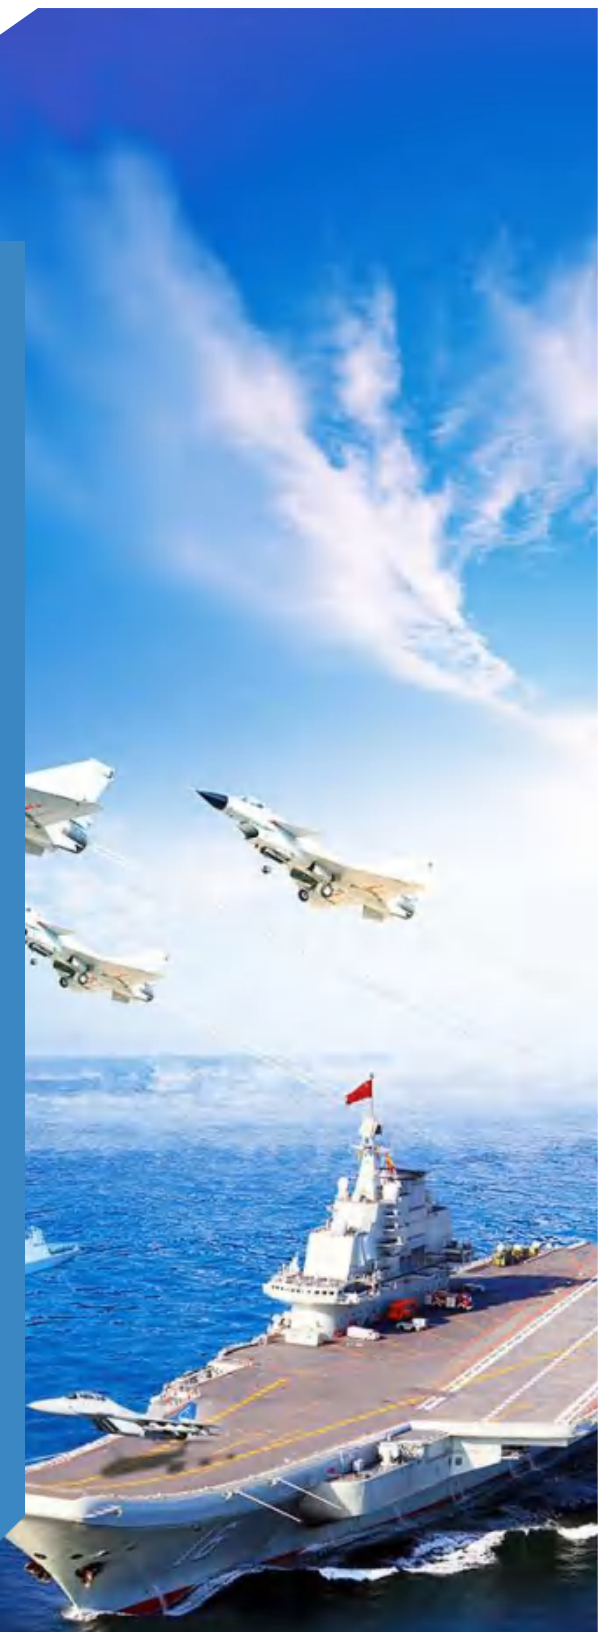


锚

ANCHORS

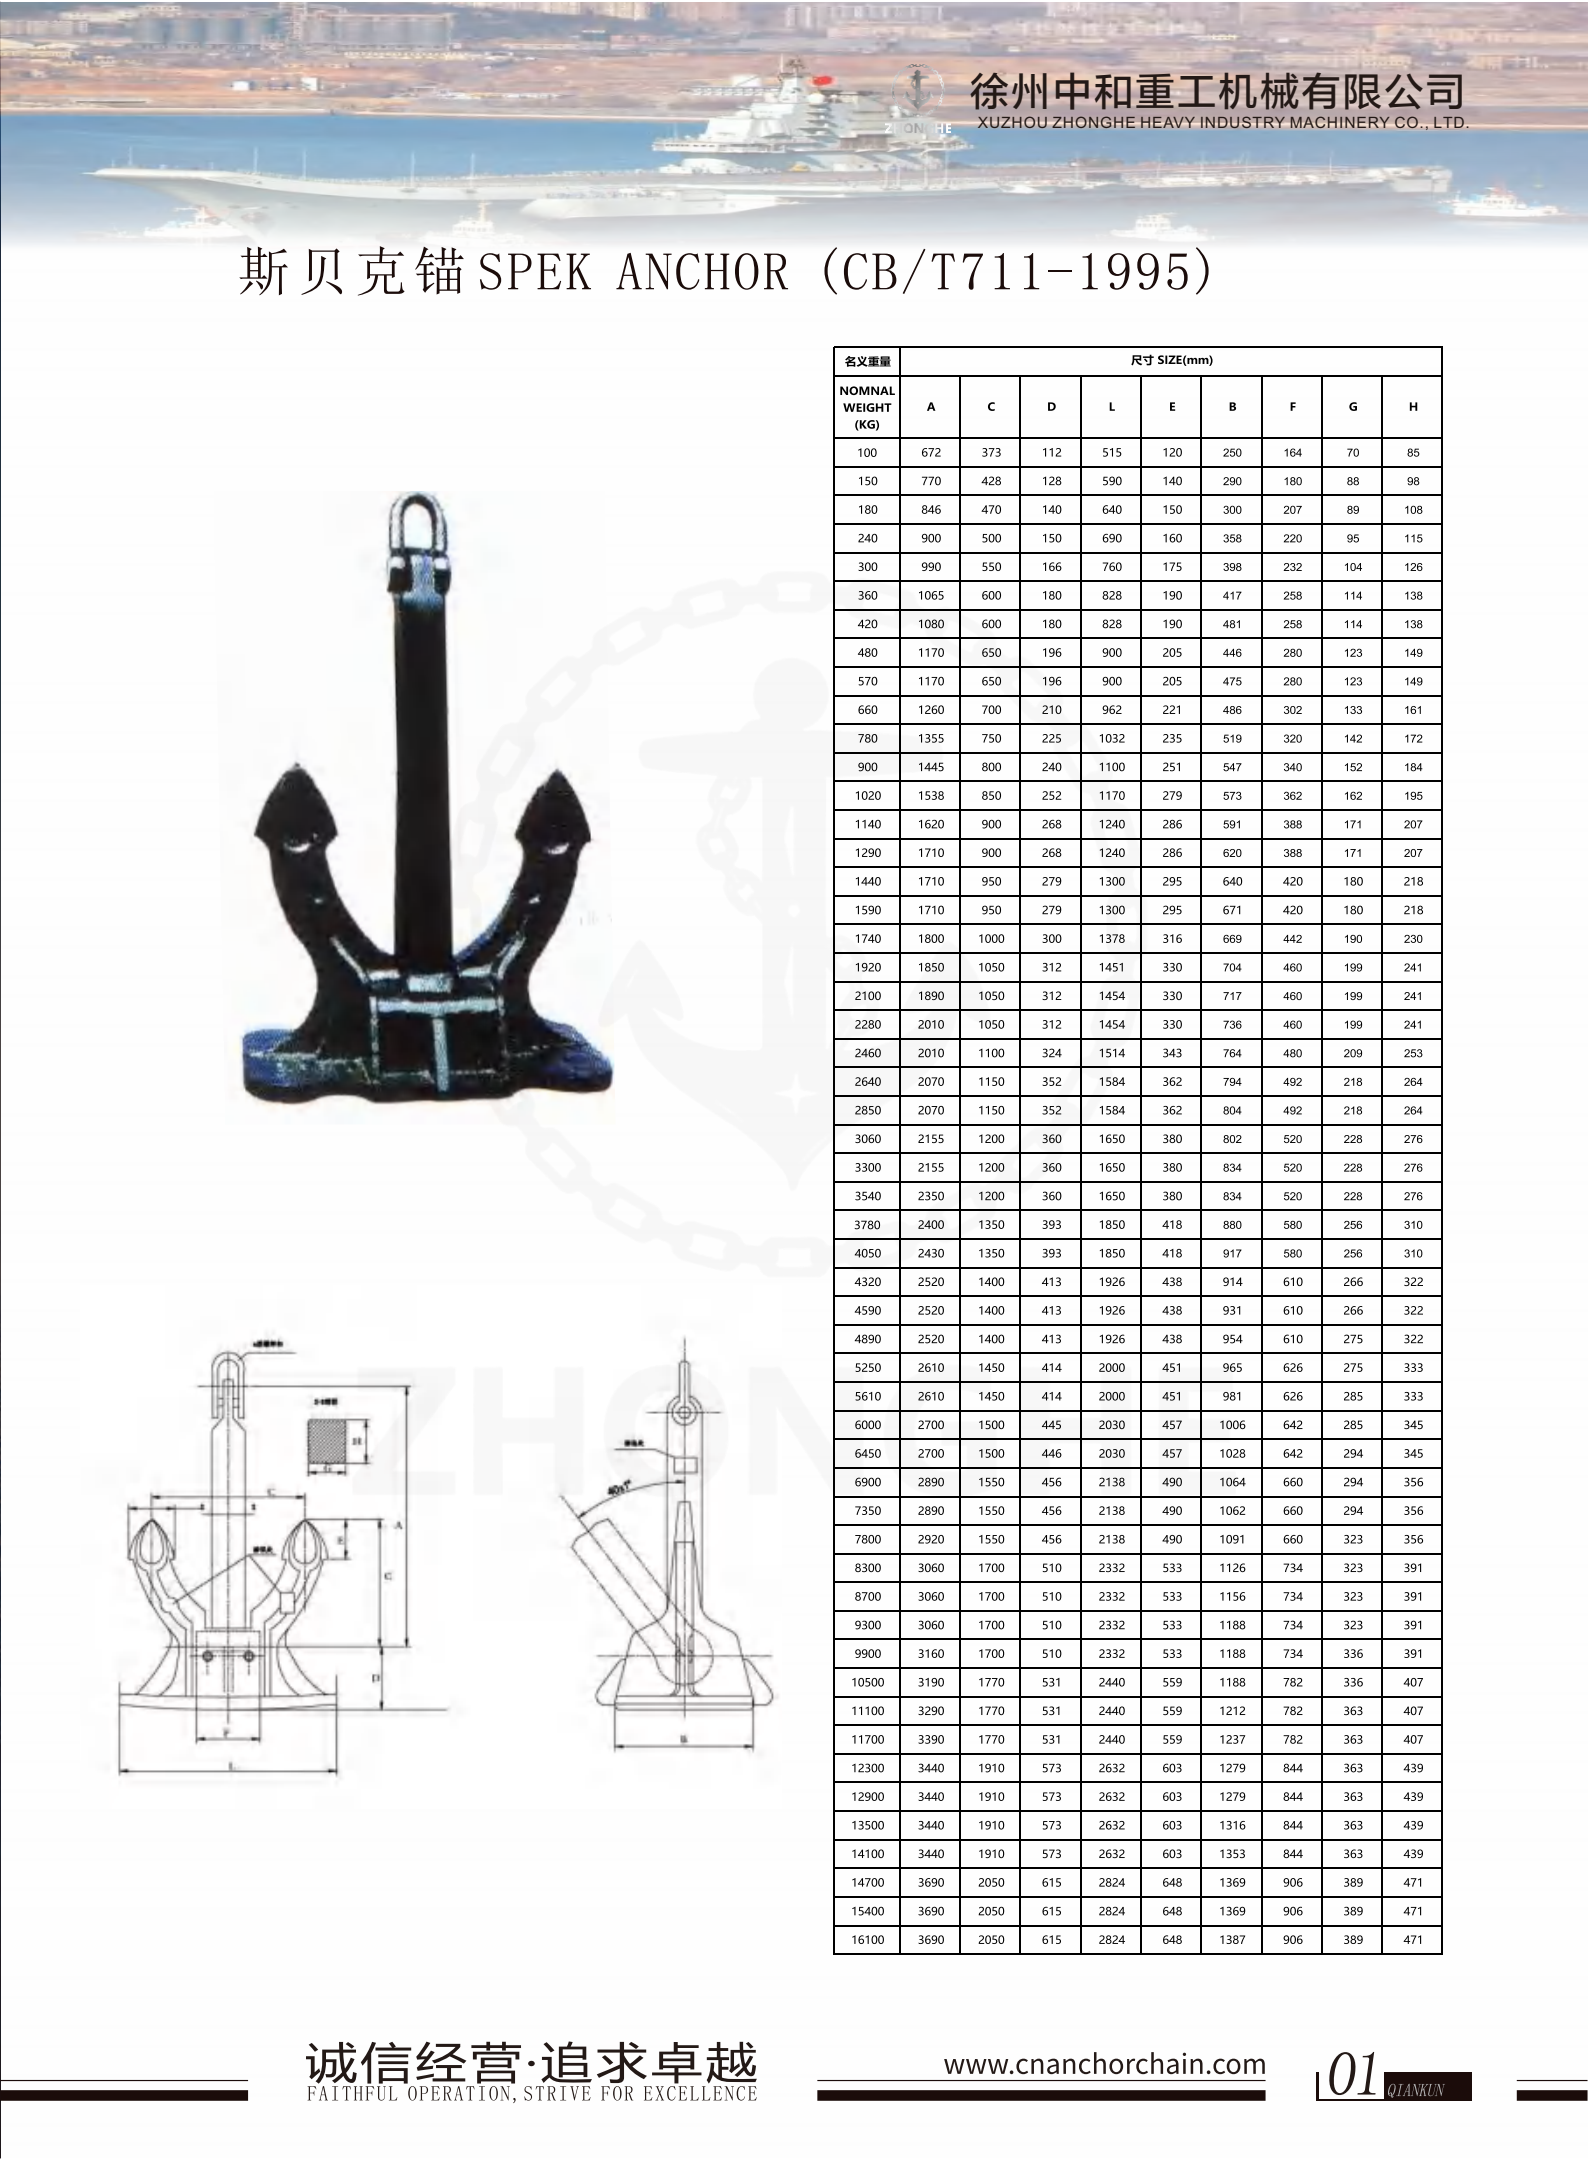

斯贝克锚 SPEK ANCHOR (CB/T711-1995)

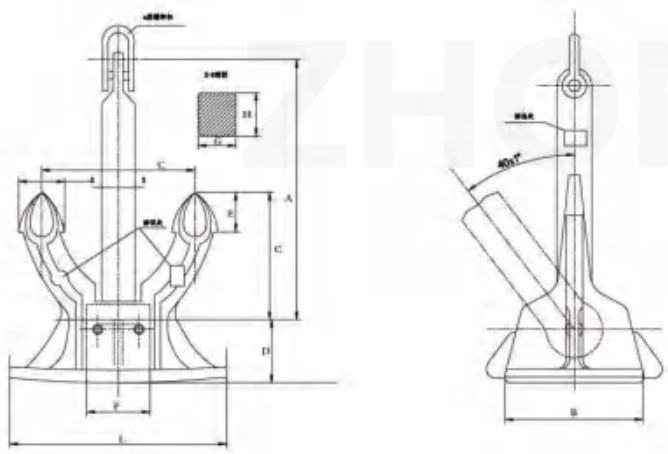


名义重量	尺寸 SIZE(mm)								
NOMNAL WEIGHT (KG)	A	C	D	L	E	B	F	G	H
100	672	373	112	515	120	250	164	70	85
150	770	428	128	590	140	290	180	88	98
180	846	470	140	640	150	300	207	89	108
240	900	500	150	690	160	358	220	95	115
300	990	550	166	760	175	398	232	104	126
360	1065	600	180	828	190	417	258	114	138
420	1080	600	180	828	190	481	258	114	138
480	1170	650	196	900	205	446	280	123	149
570	1170	650	196	900	205	475	280	123	149
660	1260	700	210	962	221	486	302	133	161
780	1355	750	225	1032	235	519	320	142	172
900	1445	800	240	1100	251	547	340	152	184
1020	1538	850	252	1170	279	573	362	162	195
1140	1620	900	268	1240	286	591	388	171	207
1290	1710	900	268	1240	286	620	388	171	207
1440	1710	950	279	1300	295	640	420	180	218
1590	1710	950	279	1300	295	671	420	180	218
1740	1800	1000	300	1378	316	669	442	190	230
1920	1850	1050	312	1451	330	704	460	199	241
2100	1890	1050	312	1454	330	717	460	199	241
2280	2010	1050	312	1454	330	736	460	199	241
2460	2010	1100	324	1514	343	764	480	209	253
2640	2070	1150	352	1584	362	794	492	218	264
2850	2070	1150	352	1584	362	804	492	218	264
3060	2155	1200	360	1650	380	802	520	228	276
3300	2155	1200	360	1650	380	834	520	228	276
3540	2350	1200	360	1650	380	834	520	228	276
3780	2400	1350	393	1850	418	880	580	256	310
4050	2430	1350	393	1850	418	917	580	256	310
4320	2520	1400	413	1926	438	914	610	266	322
4590	2520	1400	413	1926	438	931	610	266	322
4890	2520	1400	413	1926	438	954	610	275	322
5250	2610	1450	414	2000	451	965	626	275	333
5610	2610	1450	414	2000	451	981	626	285	333
6000	2700	1500	445	2030	457	1006	642	285	345
6450	2700	1500	446	2030	457	1028	642	294	345
6900	2890	1550	456	2138	490	1064	660	294	356
7350	2890	1550	456	2138	490	1062	660	294	356
7800	2920	1550	456	2138	490	1091	660	323	356
8300	3060	1700	510	2332	533	1126	734	323	391
8700	3060	1700	510	2332	533	1156	734	323	391
9300	3060	1700	510	2332	533	1188	734	323	391
9900	3160	1700	510	2332	533	1188	734	336	391
10500	3190	1770	531	2440	559	1188	782	336	407
11100	3290	1770	531	2440	559	1212	782	363	407
11700	3390	1770	531	2440	559	1237	782	363	407
12300	3440	1910	573	2632	603	1279	844	363	439
12900	3440	1910	573	2632	603	1279	844	363	439
13500	3440	1910	573	2632	603	1316	844	363	439
14100	3440	1910	573	2632	603	1353	844	363	439
14700	3690	2050	615	2824	648	1369	906	389	471
15400	3690	2050	615	2824	648	1369	906	389	471
16100	3690	2050	615	2824	648	1387	906	389	471







A. B. C型霍尔锚 TYPE A. B. C HALL ANCHOR (GB/T546-1997)


锚名 义重 量 kg	H			h	h ₁	l	l ₁	B	B ₁	H ₁	l	J	mm
	A 型	B 型	C 型										
40	557	557	430	303	67	430	303	167	198	98	78	22	a4
60	637	637	492	347	76	492	347	191	227	115	85	24	a5
100	760	760	590	410	90	584	410	228	270	115	85	24	a5
125	814	814	629	443	97	629	443	244	443	130	98	28	a5
150	866	866	665	470	103	670	470	260	308	130	98	28	a6
180	919	919	710	500	110	710	500	276	327	145	110	32	a7
240	1019	1019	788	552	121	784	552	305	361	160	122	36	a8
300	1095	1095	850	595	130	844	595	328	388	175	136	40	a9
360	1160	1160	898	630	138	898	630	347	412	175	136	40	a9
420	1222	1222	946	660	145	946	660	366	434	192	151	45	a10
480	1282	1282	986	690	152	988	690	384	454	215	163	48	a11
570	1356	1356	1042	732	161	1042	732	407	481	215	163	48	a11
660	1422	1422	1093	769	169	1096	769	426	506	235	174	50	a12
780	1506	1506	1159	813	178	1160	813	452	535	235	174	50	a12
900	1580	1580	1215	855	188	1220	855	472	560	255	200	60	a13
1020	1645	1645	1268	891	195	1268	891	492	584	255	200	60	a13
1140	1705	1705	1316	926	203	1319	926	510	605	280	215	62	a14
1290	1778	1778	1378	965	211	1374	965	532	630	280	215	62	a14
1440	1844	1844	1448	1001	219	1430	1001	552	655	280	215	62	a14
1590	1906	1906	1511	1035	226	1475	1035	571	677	310	236	68	a15
1740	1966	1966	1571	1068	234	1517	1068	589	698	310	236	68	a15
1920	2031	2031	1602	1104	241	1568	1104	609	722	310	236	68	a15
2100	2093	2091	1651	1136	249	1614	1136	628	743	340	256	74	a16
2280	2150	2150	1716	1165	255	1657	1165	645	763	340	256	74	a16
2460	2207	2207	1785	1194	262	1700	1194	662	784	340	256	74	a16
2640	2259	2259	1843	1221	268	1741	1221	678	801	380	279	82	a17
2850	2318	2318	1890	1253	275	1787	1253	695	822	380	279	82	a17
3060	2374	2374	1935	1283	282	1832	1283	712	841	380	279	82	a17
3300	2432	2432	1985	1317	288	1880	1317	731	862	385	284	82	a18
3540	2490	2490	2032	1349	295	1926	1349	749	883	385	284	82	a18
3780	2547	2547	2077	1376	302	1965	1376	765	902	410	305	90	a19
4050	2610	2610	2125	1406	309	2008	1406	783	924	410	305	90	a19
4320	2661	2661	2171	1435	316	2051	1435	798	943	410	310	90	a20
4590	2712	2712	2216	1465	322	2093	1465	813	962	415	335	100	a21
4890	2769	2769	2263	1498	329	2135	1498	830	984	415	335	100	a21
5250	2836	2836	2317	1535	337	2185	1535	850	1008	450	343	100	a22
5610	2899	2899	2369	1569	345	2234	1569	869	1031	450	343	100	a22
6000	2965	2965	2422	1605	352	2284	1605	889	1054	450	343	110	a22
6450	3037	---	2482	1644	361	2340	1644	911	1080	480	370	110	a23
6900	3100	---	2538	1681	369	2393	1684	932	1105	480	370	110	a23
7350	3173	---	2592	1717	371	2444	1717	952	1129	500	377	110	a24
7800	3235	---	2644	1752	385	2493	1752	971	1152	500	377	110	a24
8300	3363	---	2699	1788	393	2545	1788	991	1176	540	391	117	a25
8700	3355	---	2742	1816	399	2585	1816	1007	1195	540	391	117	a25
9300	3430	---	2804	1857	408	2643	1857	1030	1222	580	418	124	a26
9900	3502	---	2863	1896	417	2699	1896	1052	1248	580	418	124	a26
10500	3571	---	2920	1934	425	2752	1934	1073	1273	600	437	130	a27
11100	3638	---	2975	1970	433	2803	1970	1093	1297	600	437	130	a27
11700	3702	---	3028	2005	441	2853	2005	1112	1320	620	452	135	a28
12300	3764	---	3079	2039	448	2901	2039	1131	1342	620	452	135	a28
12900	3824	---	3128	2072	455	2947	2072	1149	1363	640	468	140	a29
13500	3882	---	3176	2104	462	2992	2104	1167	1384	640	468	140	a29
14100	3939	---	3222	2135	469	3036	2135	1184	1404	660	483	145	a30
14700	3994	---	3267	2165	476	3078	2165	1201	1424	660	483	145	a30
15100	4056	---	3318	2199	483	3126	2199	1220	1446	680	498	150	a31
16100	4117	---	3368	2232	490	3173	2232	1238	1468	680	498	150	a31
16900	4184	---	3423	2268	498	3225	2268	1258	1492	700	515	155	a32

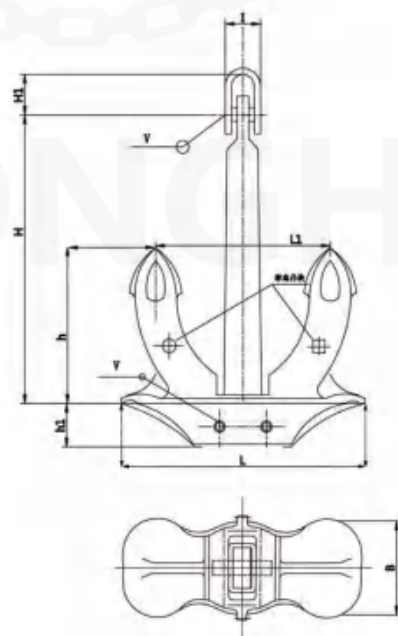

TYPE A

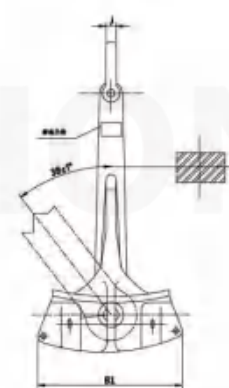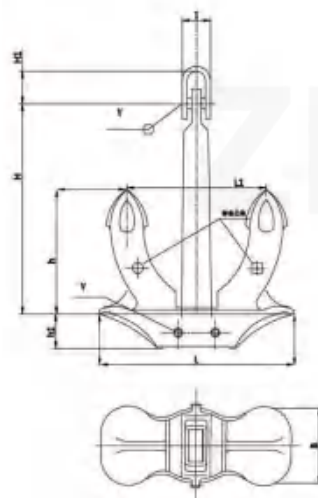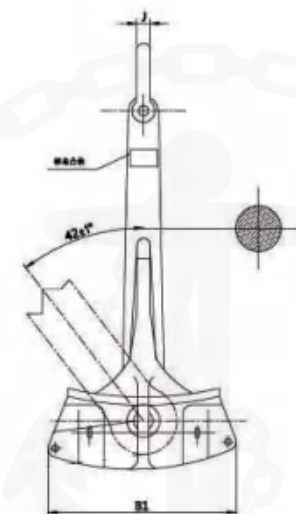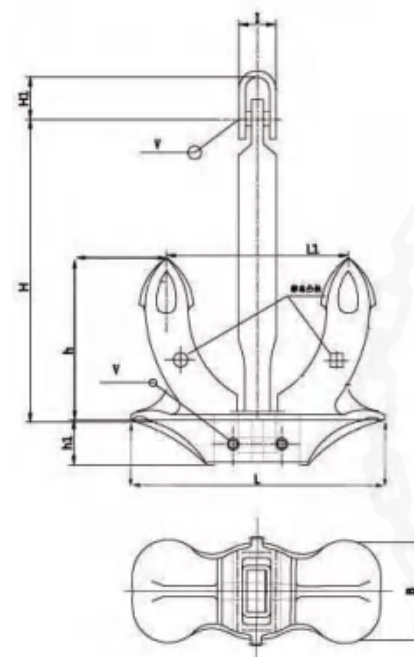


日本无杆锚 JAPAN STOCKLESS ANCHOR (CB/T3983-2008)

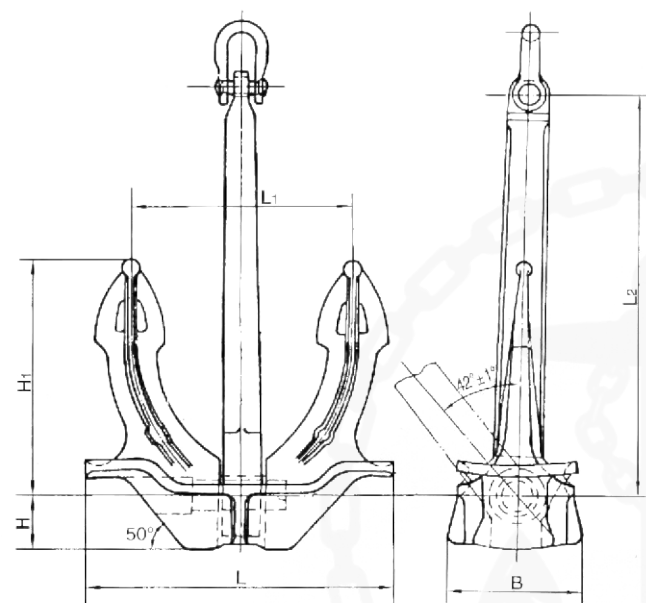

锚的名义重量 NOMINAL WEIGHT kg	mm					
	L	L1	L2	H	H1	B
100	540	378	750	91	395	230
125	580	405	810	97	425	248
150	612	432	855	104	452	264
180	650	459	910	111	480	280
240	720	510	1010	122	530	310
280	760	534	1060	130	560	325
300	770	540	1080	131	570	331
320	790	560	1100	132	580	338
360	820	580	1150	139	610	353
420	860	610	1200	146	640	370
480	900	640	1260	153	670	387
520	920	652	1295	158	680	400
570	950	670	1330	162	700	408
660	1000	710	1440	170	740	430
780	1060	750	1480	180	780	456
850	1090	770	1530	185	800	468
900	1110	780	1550	189	820	477
1020	1160	820	1620	197	860	500
1140	1200	850	1680	204	890	520
1290	1250	880	1750	212	920	540
1440	1300	920	1820	221	960	560
1590	1340	950	1880	228	990	580
1740	1380	980	1930	235	1020	600
1920	1430	1010	2000	243	1060	620
2100	1470	1040	2060	250	1090	640
2280	1510	1070	2110	257	1120	650
1460	1550	1100	2170	264	1150	670
1640	1590	1120	2230	270	1180	690
2850	1630	1150	2280	277	1210	700
3060	1670	1180	2340	284	1240	720
3300	1710	1210	2390	291	1270	740
3540	1750	1240	2450	298	1290	750
3780	1790	1260	2510	304	1320	770
4050	1830	1290	2560	311	1350	790
4320	1870	1320	2620	318	1380	800
4590	1910	1350	2670	325	1410	820
4890	1950	1380	2730	332	1440	840
5250	2000	1410	2800	340	1480	860
5610	2040	1440	2860	347	1510	880
6000	2090	1480	2930	355	1540	900
6450	2140	1510	300	364	1580	920
6900	2190	1550	3070	372	1620	940
7350	2240	1580	3140	380	1650	960
7800	2280	1610	3190	388	1680	980
8300	2330	1650	3260	396	1720	1000
8700	2370	1670	3320	403	1750	1020
9300	2420	1710	3390	411	1790	1040
9900	2470	1740	3460	420	1820	1060
10500	2520	1780	3530	428	1860	1080
11100	2570	1820	3600	437	1900	1100
11700	2610	1840	3650	444	1930	1120
12300	2650	1870	3710	450	1960	1140
12900	2690	1900	3770	457	1990	1160
13500	2740	1940	3840	466	2020	1180
14100	2780	1960	3890	473	2050	1200
14700	2820	1990	3950	479	2080	1210
15400	2860	2020	4000	486	2110	1230
16100	2900	2050	4060	493	2140	1250
16900	2950	2080	4130	500	2180	1270
17800	3000	2120	4200	510	2210	1290



海军锚 ADMIRALTY ANCHOR (GB/T545-1996)

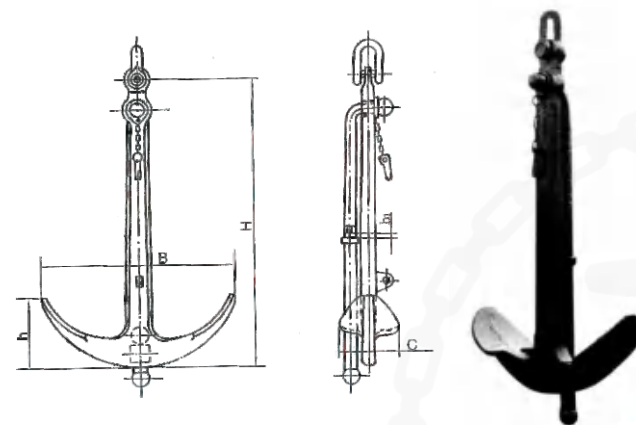


锚的名义重量 NOMINAL WEIGHT kg	mm				
	H	h	h1	B	C
50	960	230	42	635	185
75	1105	266	45	710	210
100	1215	293	49	780	230
125	1310	316	52	840	245
150	1395	336	55	900	265
200	1535	370	61	990	290
250	1650	398	65	1065	310
300	1755	423	70	1105	330
400	1930	465	77	1240	365
500	2080	502	84	1335	390
600	2210	533	89	1440	415
700	2330	560	93	1500	440
800	1435	587	97	1570	460
900	2530	610	101	1630	475
1000	2620	633	104	1685	495
1250	2825	680	112	1810	535
1500	3000	725	118	1955	565
2000	3300	797	131	2140	625
2500	3550	857	138	2270	672
3000	3780	912	150	2415	715
3500	3980	960	158	2540	750
4000	4160	1000	155	2650	785
5000	4480	1100	184	3000	800

马氏大抓力锚


HIGH HOLDING POWER MATROSOV ANCHOR
(CB/T57-1977)

锚的名义重量 NOMINAL WEIGHT kg	mm					
	A	C	E	F	H	α°
25	130	570	690	385	214	28-30
35	148	620	760	420	230	30-32
50	170	680	840	480	250	30-32
75	190	770	950	540	270	30-32
100	210	830	1060	590	290	30-32
125	226	870	1130	630	310	30-32
150	242	910	1190	670	330	30-32
200	270	980	1300	740	370	30-32
250	294	1040	1380	800	400	33-37
300	312	1090	1480	850	430	33-37
400	342	1190	1630	930	480	33-37
500	366	1280	1750	1000	520	33-37
650	400	1385	1910	1090	565	33-37
750	418	1450	2000	1140	590	33-37
1000	452	1570	2170	1240	630	33-37
1250	488	1660	2280	1300	660	33-37
1500	515	1715	2370	1350	675	33-37

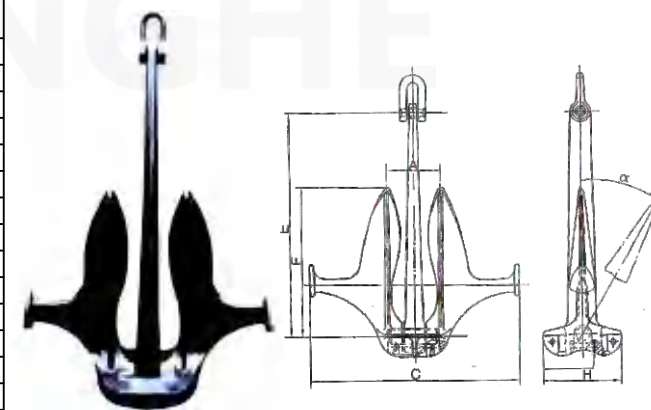


AC-14大抓力锚

(AC-14) HHP STOCKLESS ANCHOR
(CB/T3972-2005)

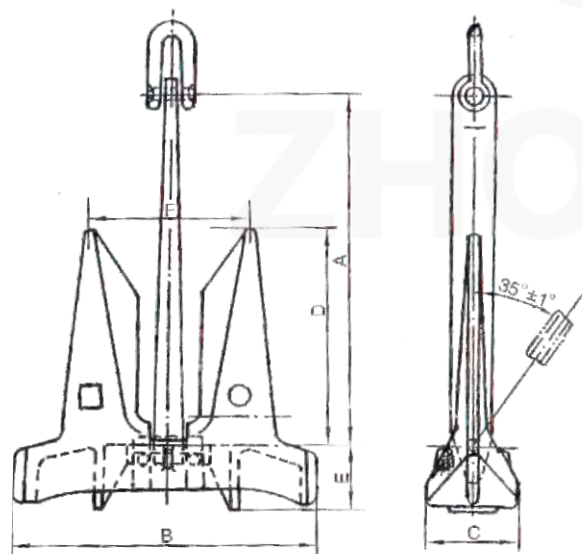

名义重量 NOMINAL WEIGHT (KG)	尺寸 SIZE(mm)					
	A	B	C	D	E	F
56	612	555	170	376	109	298
100	745	675	200	458	130	364
180	909	822	252	558	162	442
300	1075	975	298	660	194	524
428	1213	1098	336	745	216	590
675	1410	1278	390	868	250	690
750	1450	1315	396	878	256	700
910	1560	1410	430	957	273	760
970	1592	1445	440	978	284	775
1080	1650	1495	455	1014	294	805
1305	1760	1595	485	1082	313	858
1440	1818	1645	505	1118	324	885
1710	1925	1745	532	1184	343	940
1845	1975	1785	546	1215	347	965
2100	2065	1865	570	1268	354	1005
2475	2175	1970	602	1340	385	1062
2835	2265	2055	625	1393	399	1105
3550	2455	2225	680	1508	438	1198
3940	2540	2300	705	1562	453	1240
4500	2655	2405	735	1632	473	1295
4840	2720	2465	755	1670	490	1330
5610	2858	2590	790	1758	509	1396
6000	2922	2646	810	1796	515	1426
6900	3062	2775	848	1884	545	1496
7800	3190	2890	884	1962	569	1558
8300	3256	2950	902	2002	574	1590
9300	3382	3064	936	2080	603	1652
9900	3452	3128	956	2124	616	1686
10575	3523	3192	976	2166	628	1720
11100	3589	3192	976	2166	628	1720
11700	3650	3308	1010	2245	648	1782
12300	3683	3330	1018	2260	655	1794
12900	3772	3418	1044	2320	670	1842
13500	3830	3470	1060	2355	682	1870
14100	3885	3520	1076	2389	689	1896
14700	3940	3570	1090	2423	700	1924
15400	4002	3626	1108	2461	710	1954
16100	4062	3680	1125	2498	721	1982
16900	4128	3740	1144	2538	721	2016
17800	4200	3806	1162	2583	725	2050
18800	4277	3875	1185	2630	729	2088
20000	4350	3945	1185	2694	729	2101
25000	5046	4577	1375	3125	846	2437
30000	5162	4730	1440	3218	898	2558
35000	5434	4979	1516	3388	945	2693
40000	5678	5203	1584	3540	988	2814
45000	5905	5411	1647	3681	1027	2926
50000	6117	5605	1706	3813	1064	3031
55000	6313	5785	1761	3936	1098	3128
60000	6504	5960	1814	4055	1131	3223
65000	6680	6121	1863	4164	1162	3310
70000	6845	6272	1909	4267	1191	3392
75000	7005	6419	1954	4367	1219	3471
80000	7155	6556	1996	4460	1245	3545
85000	7304	6693	2038	4553	1271	3620
90000	7444	6821	2076	4640	1295	3688
95000	7578	6944	2114	4724	1318	3755
100000	7707	7062	2150	4804	1341	3819

丹福尔大抓力锚 DANFORTH HIGH HOLDING POWER ANCHOR

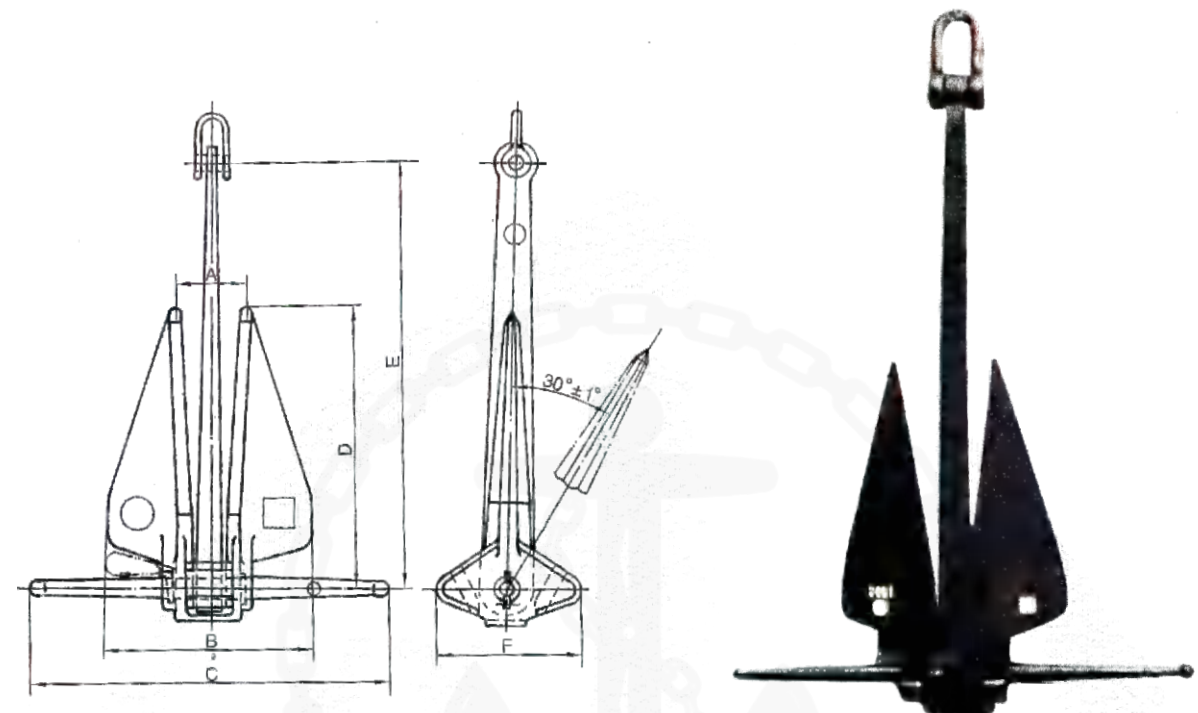


锚的名义重量 NOMINAL WEIGHT kg	A	B	C	D	E	F
20	130	280	540	370	690	170
25	135	300	580	400	740	185
30	148	330	620	430	790	200
40	160	360	680	470	860	220
50	172	390	720	510	940	230
60	186	408	755	535	985	240
75	200	450	830	590	1080	260
100	216	490	930	640	1180	290
120	220	505	970	670	1230	300
125	234	520	1000	690	1270	310
150	242	550	1060	732	1348	330
200	266	600	1150	810	1490	360
250	294	650	1240	870	1600	390
276	296	660	1250	885	1620	400
300	312	690	1320	925	1700	420
400	342	750	1460	1010	1810	460
500	368	800	1570	1100	2020	490
750	414	910	1800	1260	2300	560
1000	450	980	1980	1380	2540	620
1250	484	1070	2100	1490	2740	670
1500	512	1120	2220	1580	2910	700
2000	560	1130	2440	1730	2850	770
2500	605	1217	2628	1864	3070	830
4000	700	1420	3070	2170	3590	970
5000	735	1482	3200	2270	3840	1020
6000	800	1620	3500	2480	4100	1100




M型斯贝克锚 TYPE M SPEK ANCHOR

名义重量 NOMNAL WEIGHT (KG)	尺寸 SIZE(mm)					
	A	B	C	D	E	H
80	339	468	108	611	336	222
105	371	512	120	669	336	242
135	371	512	149	669	368	254
180	445	613	142	800	440	290
240	445	613	182	800	440	304
300	527	727	168	949	522	344
360	527	727	190	949	522	358
420	590	813	188	1062	584	385
480	590	813	211	1062	584	395
570	652	900	208	1175	647	428
660	653	900	236	1175	647	438
780	725	1000	231	1305	718	473
900	725	1000	264	1215	718	485
1020	793	1093	252	1428	785	518
1140	793	1093	277	1428	785	530
1290	858	1183	273	1544	850	561
1440	858	1183	299	1544	850	573
1590	920	1268	293	1655	911	604
1740	920	1268	315	1655	911	611
1920	980	1350	312	1761	970	640
2100	980	1350	337	1761	970	650
2280	1038	1430	331	1866	1027	678
2460	1038	1430	355	1866	1027	688
2640	1090	1500	347	1959	1079	712
2850	1190	1500	380	1950	1079	722
3060	1144	1578	365	2058	1133	748
3300	1144	1578	387	2058	1133	760
3540	1202	1656	383	2159	1189	785
3780	1202	1656	405	2159	1189	797
4050	1257	1732	400	2258	1244	821
4320	1257	1732	422	2258	1244	831
4590	1257	1732	444	2258	1244	841
4890	1338	1846	426	2405	1325	874
5250	1338	1846	450	2405	1325	888
5610	1432	1974	431	2405	1418	936
6000	1432	1974	457	2577	1418	936
6450	1432	1974	483	2577	1418	950
6900	1533	2112	462	2757	1518	1001
7350	1533	2112	488	2757	1518	1001
7800	1533	2112	514	2757	1518	1015
8300	1621	2234	489	2916	1605	1059
8700	1621	2234	517	2916	1605	1059
9300	1621	2234	545	2916	1605	1074
9900	1726	2380	520	3105	1709	1128
10500	1726	2380	550	3105	1709	1128
11100	1726	2380	580	3105	1709	1138
11700	1819	2507	554	3273	1801	1188
12300	1819	2507	580	3273	1801	1188
12900	1819	2507	607	3273	1801	1200
13500	1904	2624	577	3425	1885	1243
14100	1904	2624	607	3425	1885	1243
14700	1904	2624	650	3425	1885	1243
15400	1904	2624	657	3425	1885	1263
16100	2018	2782	612	3632	1998	1318
16900	2018	2782	638	3632	1998	1318
17800	2018	2782	683	3632	1998	1318
18800	2018	2782	699	3632	1998	1343
20000	2170	2990	652	3905	2148	1416

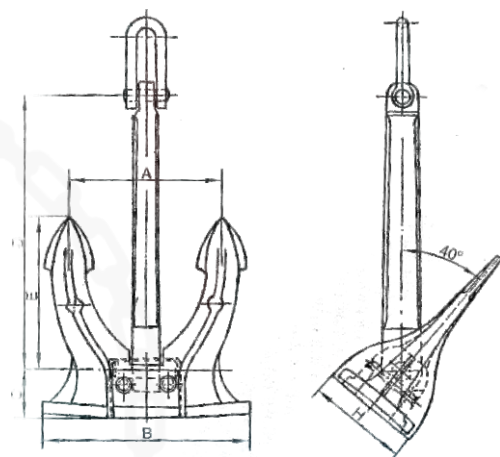


轻量型锚 LIGHT WEIGHT ANCHOR

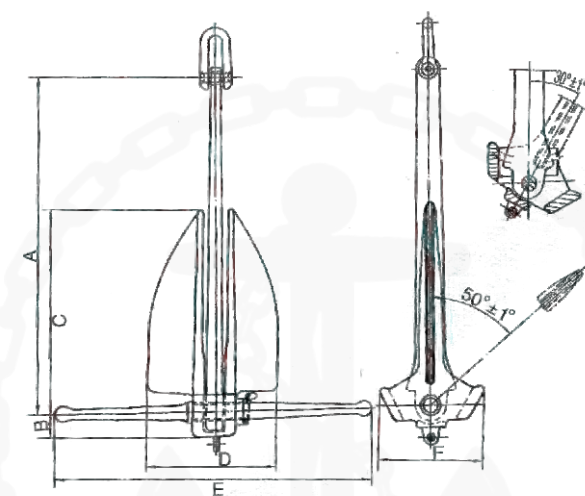


锚的名义重量 NOMINAL WEIGHT kg(lb)	A	B	C	D	E	F
23 (50)	595	43	365	235	565	200
34 (75)	685	50	415	270	645	230
45 (100)	750	54	460	295	715	255
60	810	60	498	318	767	278
68 (150)	860	62	525	340	815	290
91 (200)	945	69	580	370	900	320
136 (300)	1085	79	660	425	1030	365
181 (400)	1190	87	730	470	1130	402
227 (500)	1285	94	785	505	1220	435
272 (600)	1365	100	834	536	1296	462
340 (750)	1470	107	900	575	1395	500
454 (1000)	1620	118	990	635	1535	550
567 (1250)	1770	126	1070	685	1660	595
680 (1500)	1920	134	1140	730	1770	635
771 (1700)	1960	140	1190	760	1840	660
910	2040	147	1250	800	1940	690
1140	2200	160	1340	865	2085	745
1980 (4365)	2645	193	1615	1040	2510	895
2268 (5000)	2815	200	1700	1085	2630	960
2730 (6000)	3150	205	1930	1200	2990	1040
3000	2982	222	1854	1200	2895	1040
4536 (10000)	3490	254	2130	1370	3310	1180
5500	3710	274	2260	1450	3520	1264
6804 (15000)	3990	294	2440	1570	3790	1362

美国海军型无杆锚 U. S. N STOCKLESS ANCHOR

锚的名义重量 NOMINAL WEIGHT kg(Lb)	mm					
	A	h	h1	L	L1	B
45(100)	540	382	51	126	413	264
68(150)	618	438	58	145	473	302
91(200)	654	464	62	151	502	318
136(300)	727	516	70	164	562	350
159(350)	762	542	72	170	591	367
181(400)	800	568	75	176	619	384
227(500)	864	612	81	191	667	413
272(600)	914	651	85	202	709	439
340(750)	987	700	92	218	764	474
454(1000)	1071	771	102	239	841	521
567(1250)	1168	830	110	258	902	559
680(1500)	1245	883	116	273	962	597
907(2000)	1372	972	135	302	1059	656
998(2200)	1387	1003	140	311	1092	676
1134(2500)	1473	1048	143	324	1140	706
1361(3000)	1613	1130	150	352	1270	775
1588(3500)	1648	1171	153	363	1273	789
1814(4000)	1724	1225	160	379	1334	827
2268(5000)	1854	1319	173	408	1437	889
2722(6000)	1975	1403	185	435	1529	948
3175(7000)	2083	1475	195	458	1606	996
4082(9000)	2261	1613	210	492	1753	1080
5216(11500)	2450	1740	229	540	1896	1175
6000(13228)	2450	1740	229	540	1896	1175
8165(18000)	2845	2020	270	615	2100	1364
9072(20000)	2946	2094	276	648	2280	1413
11340(25000)	3175	2256	297	699	2456	1522
13608(30000)	3372	2394	316	742	2608	1616

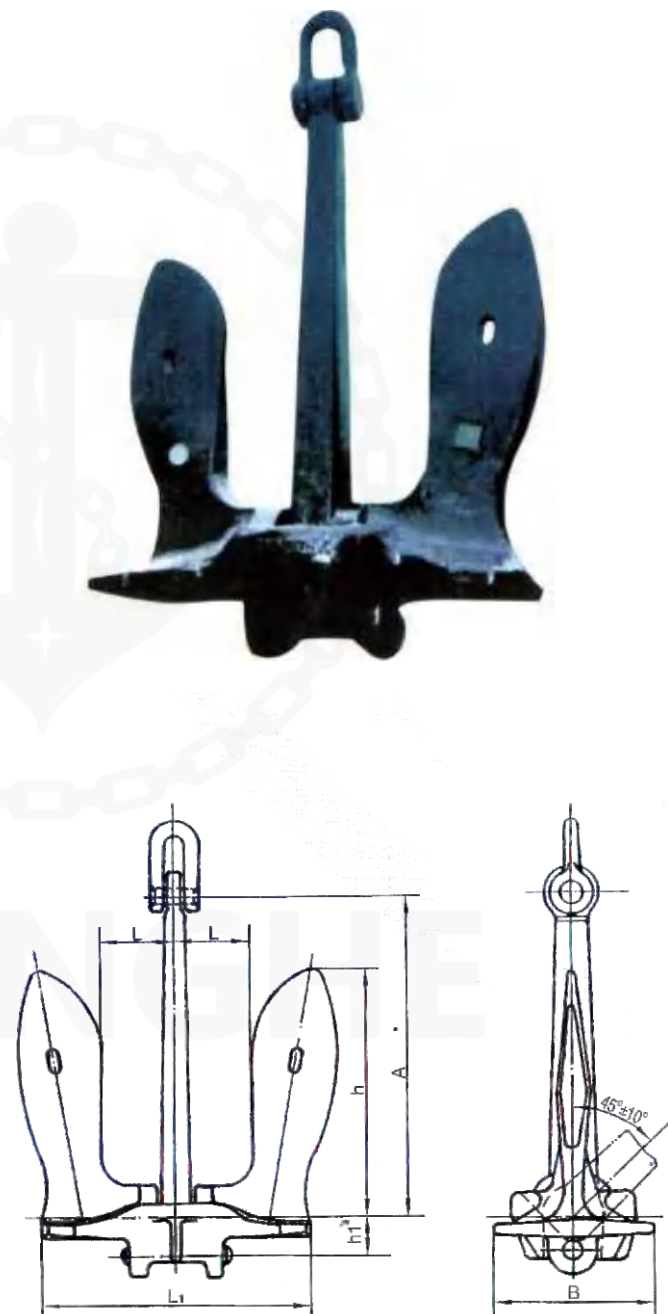


JYD型大抓力锚 JYD-TYPE HIGH HOLDING POWER ANCHOR

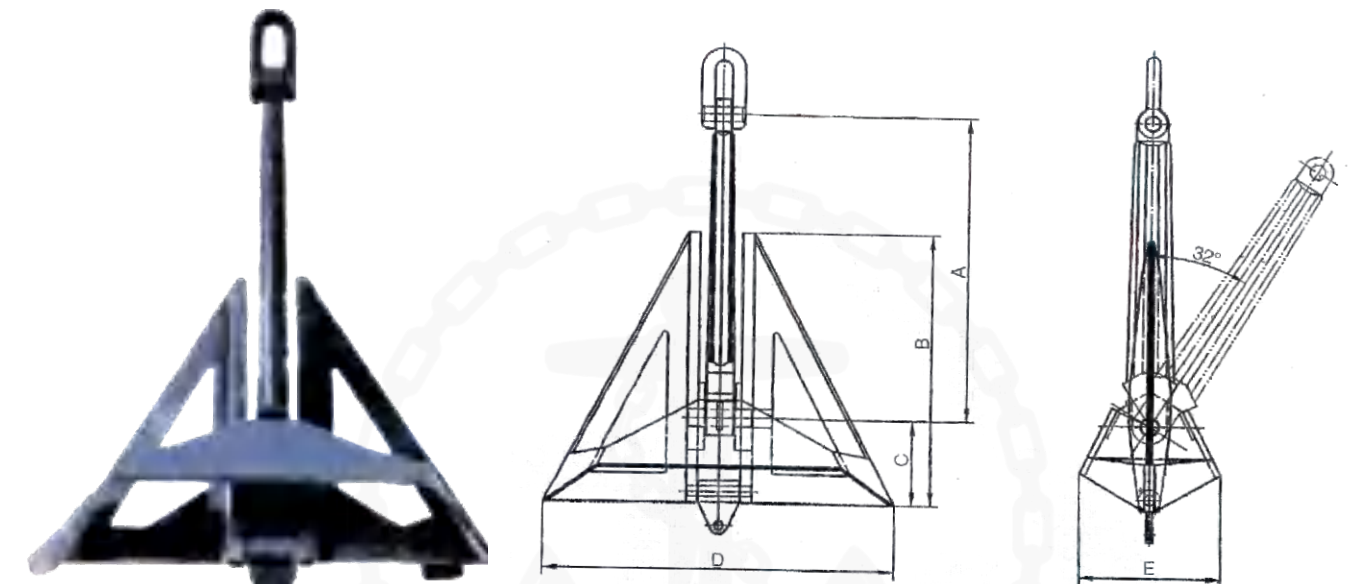


锚的名义重量 NOMINAL WEIGHT kg	mm					配合卸扣型号 GB/T547-94
	A	B	C	D	E	
300	1080	960	300	1200	485	a10
500	1280	1138	356	1423	575	a12
750	1466	1303	407	1629	658	a13
1000	1613	1434	448	1793	724	a14
1500	1847	1642	513	2052	829	a15
2000	2033	1807	565	2259	913	a17
2500	2190	1946	608	2433	983	a18
3000	2327	2068	646	2585	1045	a19
3500	2449	2177	680	2722	1100	a21
4000	2561	2276	711	2846	1150	a22
5000	2759	2452	766	3065	1239	a23
6000	2932	2606	814	3257	1316	a24
7000	3086	2743	857	3429	1386	a26
7500	3158	2807	877	3509	1418	a26
8000	3227	2868	896	3585	1449	a27
9000	3356	2983	932	3729	1507	a28
10000	3476	3090	965	3862	1561	a29
11000	3588	3189	997	3987	1611	a30
12000	3694	3283	1026	4104	1659	a31
13500	3841	3415	1067	4268	1725	a33
15000	3979	3537	1105	4421	1787	a34
20000	4379	3893	1216	4866	1967	a36

JYN型大抓力锚(波尔锚N型)
JYN-TYPE HIGH HOLDING POWER ANCHOR (CB/T 3221-1984)

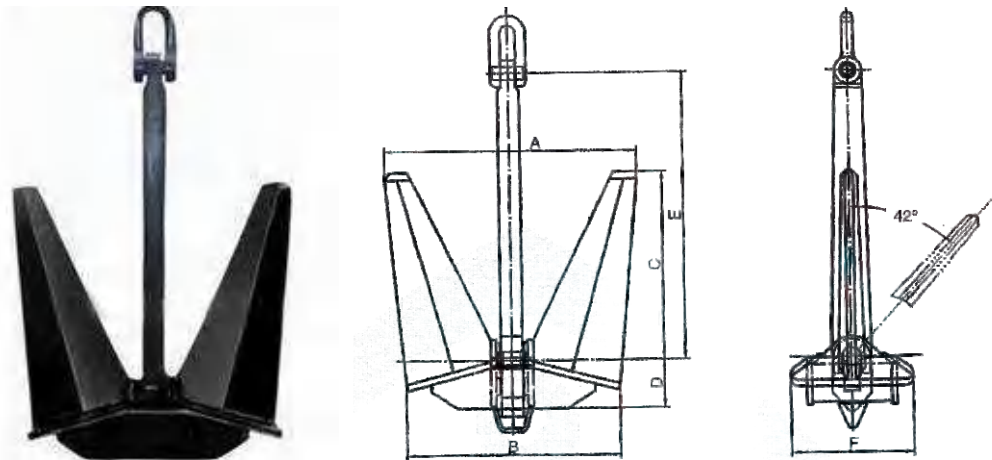


锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94	锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94
	A	B	C	D	E	F			A	B	C	D	E	F	
12	323	275	250	65	383	155	a1	2140	1817	1544	1411	349	2152	860	a17
20	386	325	300	75	458	185	a2	2250	1850	1570	1430	360	2185	900	a17
25	409	350	316	80	485	200	a3	2500	1920	1630	1480	375	2265	930	a18
40	479	410	370	95	567	235	a4	2655	1954	1664	1516	372	2312	925	a18
50	517	440	400	100	613	255	a5	2835	1996	1700	1550	380	2364	945	a19
60	550	470	425	110	652	270		3040	2042	1735	1585	390	2418	968	a19
80	608	515	470	120	720	295		3240	2086	1773	1620	398	2471	988	a20
100	653	555	505	130	775	320	a6	3445	2129	1809	1653	406	2522	1009	a21
120	699	595	540	135	825	340	a7	3670	2174	1847	1689	415	2576	1030	a21
135	723	614	562	139	858	342		3940	2226	1892	1730	425	2640	1055	a22
160	764	650	590	150	905	370		4210	2276	1934	1758	434	2698	1078	a22
180	795	675	615	155	940	385	a8	4500	2328	1978	1808	444	2758	1103	a22
200	825	700	640	160	978	400	a9	4840	2385	2026	1852	455	2825	1130	a23
225	858	729	666	165	1016	406		5175	2439	2072	1894	465	2889	1155	a23
240	880	745	680	175	1040	425		5515	2491	2116	1934	475	2950	1180	a24
280	925	780	715	180	1092	450	a10	5850	2541	2159	1973	485	3009	1204	a24
320	964	820	745	190	1140	470		6225	2594	2204	2014	495	3072	1229	a25
360	1005	855	780	195	1190	490		6525	2635	2239	2046	503	3121	1248	a25
400	1040	885	805	205	1230	505	a11	6975	2695	2290	2092	514	3191	1276	a26
440	1074	910	830	210	1270	520		7425	2751	2337	2136	525	3258	1303	a26
480	1105	940	855	215	1305	535		7875	2805	2384	2178	535	3323	1329	a27
520	1133	960	875	220	1340	550	a12	8325	2858	2428	2219	545	3385	1354	a28
560	1165	985	900	230	1375	565		8775	2908	2471	2258	555	3445	1378	a28
600	1191	1010	920	235	1410	580		9225	2958	2412	2296	564	3502	1401	a29
640	1217	1035	940	240	1440	590	a13	9675	3004	2553	2333	573	3558	1423	a29
675	1237	1051	960	237	1464	585		10125	3050	2592	2369	582	3613	1445	a30
720	1262	1075	975	250	1495	615		10575	3095	2630	2403	590	3666	1466	a30
800	1310	1115	1015	255	1550	635	a14	11025	3138	2667	2437	599	3717	1486	a31
855	1338	1137	1039	257	1585	633		11550	3187	2708	2475	608	3775	1510	a31
900	1365	1160	1055	268	0.1615	665		12075	3235	2748	2512	617	3831	1533	a32
970	1396	1186	1084	270	1654	660	a15	12675	3288	2794	2553	628	3894	1557	a32
1000	1410	1200	1090	275	1670	670		13350	3345	2842	2598	638	3962	1585	a33
1080	1447	1229	1123	278	1713	684		14100	3406	2895	2645	694	4035	1614	a33
1250	1521	1290	1175	300	1800	740	a16	15000	3478	2955	2700	664	4119	1647	a34
1305	1541	1309	1196	296	1824	729		15400	3508	2981	2724	669	4155	1662	a34
1500	1615	1370	1250	315	1910	785		16125	3563	3027	2766	680	4220	1687	a35
1575	1641	1394	1274	315	1943	776	a17	17250	3643	3096	2829	696	4315	1726	a35
1750	1705	1445	1320	335	2015	830		18375	3712	3162	2889	710	4407	1762	a36
1845	1729	1469	1343	332	2049	818		19500	3795	3225	2947	725	4495	1798	a36
2000	1780	1510	1375	350	2105	865	a17	20625	3867	3286	3003	738	4580	1832	a36

JYT型大抓力锚(波尔锚T型)
JYT-TYPE HIGH HOLDING POWER ANCHOR

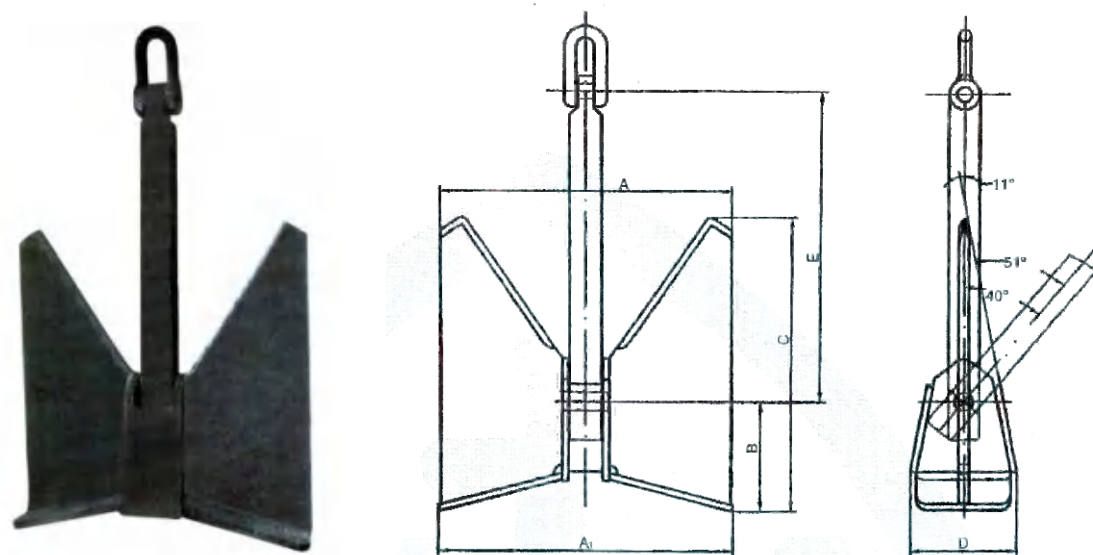


锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94	锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94
	A	A1	B	C	D	E			A	A1	B	C	D	E	
105	636	648	245	660	239	698	a6	2835	1908	1945	736	1981	716	2094	a19
135	691	705	267	718	260	759	a7	3040	1953	1990	753	2028	733	2144	a19
160	732	746	282	760	275	803	a8	3240	1995	2033	769	2071	749	2190	a20
180	761	776	294	790	286	835	a9	3445	2036	2075	785	2114	764	2235	a21
225	820	836	316	851	308	900		3670	2079	2119	802	2159	780	2282	a21
270	871	888	336	905	327	956		3940	2129	2170	821	2211	799	2337	a22
300	902	920	348	937	339	991	a10	4210	2176	2218	839	2260	817	2389	a22
360	959	977	370	996	360	1053	a11	4500	2225	2268	858	2311	835	2443	a23
430	1017	1037	392	1057	382	1117		4840	2280	2324	879	2368	856	2503	a23
495	1066	1087	411	1107	400	1171		5175	2331	2376	899	2421	875	2560	a23
565	1114	1136	430	1157	418	1223	a12	5250	2343	2388	904	2433	879	2572	a24
675	1182	1205	456	1228	444	1298		5515	2381	2427	918	2473	894	2614	a24
765	1233	1257	475	1280	463	1353		5850	2429	2476	937	2522	912	2666	a24
855	1279	1304	493	1329	480	1404	a14	6225	2480	2527	956	2575	931	2722	a25
970	1334	1360	515	1386	501	1465		6975	2575	2625	993	2675	967	2827	a26
1080	1383	1410	533	1436	519	1518		7875	2682	2733	1034	2785	1007	2944	a27
1250	1452	1480	560	1508	545	1594	a15	8325	2732	2785	1054	2837	1025	2999	a27
1305	1473	1501	568	1530	553	1617		8775	2780	2834	1072	2887	1004	3052	a28
1440	1522	1551	587	1581	571	1671		9225	2827	2881	1090	2936	1061	3103	a28
1575	1568	1599	605	1629	589	1722	a16	9675	2872	2928	1108	2983	1078	3153	a29
1710	1612	1643	622	1674	605	1769		10125	2916	2972	1125	3029	1095	3201	a29
1845	1653	1685	638	1717	621	1815		10575	2959	3016	1141	3073	1111	3248	a30
1980	1693	1725	653	1758	635	1858	a17	11025	3000	3058	1157	3116	1126	3293	a30
2140	1737	1770	670	1804	652	1907		12075	3092	3152	1193	3212	1161	3395	a31
2295	1778	1812	686	1847	667	1952		12675	3143	3203	1212	3264	1180	3450	a32
2475	1823	1858	703	1894	684	2002	a18	13350	3198	3259	1233	3321	1200	3510	a32
2750	1888	1925	728	1961	709	2073	a19	14100	3256	3319	1256	3382	1222	3575	a33

JYNP型大抓力锚(波尔锚NP型) JYNP-TYPE HIGH HOLDING POWER BALANCED ANCHOR

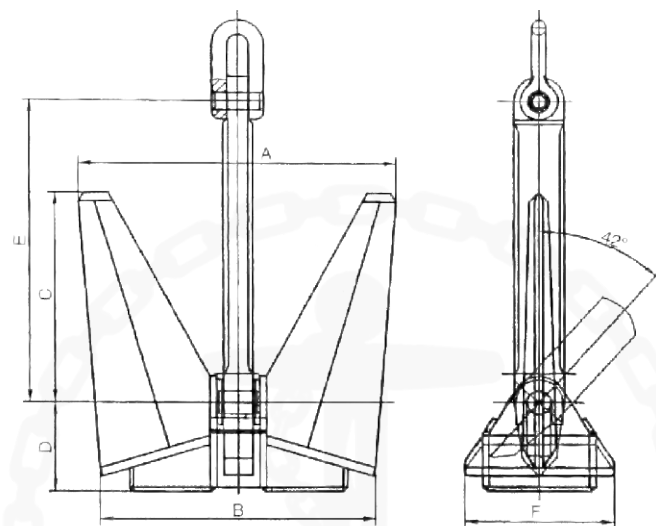

锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94	锚的名义重量 kg	mm						配合卸扣型号 GB/T547-94
	A	B	C	D	E	F			A	B	C	D	E	F	
12	313	271	211	89	304	148	a1	3240	2025	1754	1367	575	1967	957	a20
20	371	322	251	106	361	175	a2	3445	2066	1790	1395	587	2008	976	a21
40	468	405	316	133	455	221	a4	3670	2110	1828	1425	600	2051	997	a21
60	536	464	362	152	521	253	a5	3940	2161	1872	1459	614	2100	1021	a21
80	590	511	398	168	573	279	a5	4210	2209	1914	1492	628	2147	1044	a22
100	635	550	429	180	617	300	a6	4500	2259	1957	1525	642	2195	1067	a22
120	675	585	456	192	656	319	a6	4840	2314	2005	1563	658	2249	1093	a23
135	702	608	474	199	682	332	a7	5175	2367	2050	1598	672	2300	1118	a23
180	773	669	522	219	751	365	a8	5515	2417	2094	1632	687	2349	1142	a24
225	832	721	562	236	809	393	a9	5850	2465	2136	1664	700	2396	1165	a24
270	884	766	597	251	859	418	a9	6225	2517	2180	1699	715	2446	1189	a25
300	916	793	618	260	890	433	a10	6525	2557	2215	1726	726	2485	1208	a25
360	973	843	657	277	946	460	a11	6975	2614	2265	1765	743	2540	1235	a26
430	1033	895	697	293	1004	486	a11	7425	2669	2312	1802	758	2594	1261	a26
495	1082	938	731	308	1052	511	a12	7875	2722	2358	1838	773	2645	1286	a27
585	1144	991	773	325	1112	541	a12	8325	2773	2402	1872	788	2695	1310	a27
675	1200	1040	810	341	1166	567	a13	8775	2822	2445	1905	802	2742	1333	a28
765	1251	1084	845	356	1216	591	a13	9225	2870	2486	1937	815	2789	1356	a28
855	1299	1125	877	369	1262	614	a14	9675	2915	2526	1968	828	2833	1377	a29
970	1354	1173	914	385	1316	640	a14	10125	2960	2564	1998	841	2876	1398	a29
1080	1404	1216	948	399	1364	663	a15	10575	3003	2602	2028	853	2918	1419	a30
1195	1452	1258	980	413	1411	686	a15	11025	3045	2638	2056	865	2959	1439	a30
1305	1495	1295	1009	425	1453	706	a15	11550	3093	2679	2088	879	3005	1461	a31
1440	1545	1338	1043	439	1501	730	a16	12075	3139	2719	2119	892	3050	1483	a31
1575	1592	1379	1075	452	1547	752	a16	12675	3190	2763	2154	906	3100	1507	a32
1710	1636	1417	1105	465	1590	773	a16	13350	3246	2812	2191	922	3154	1534	a32
1845	1678	1454	1133	477	1631	793	a17	14100	3305	2863	2232	939	3212	1562	a33
1980	1718	1488	1160	488	1670	812	a17	15000	3374	2923	2278	959	3279	1594	a33
2140	1763	1527	1190	501	1713	833	a17	16125	3457	2994	2334	982	3359	1633	a34
2295	1805	1563	1218	513	1754	853	a18	17250	3535	3062	2387	1004	3435	1670	a34
2475	1851	1603	1250	526	1799	874	a18	18375	3610	3128	2438	1026	3509	1706	a35
2655	1895	1641	1279	538	1841	895	a18	19500	3683	3190	2486	1046	3579	1740	a35
2835	1936	1677	1307	550	1882	915	a19	20625	3752	3250	2533	1066	3646	1773	a36
3040	1982	1717	1338	563	1926	936	a19								

贝尔特脱锚BALDT STOCKLESS ANCHOR

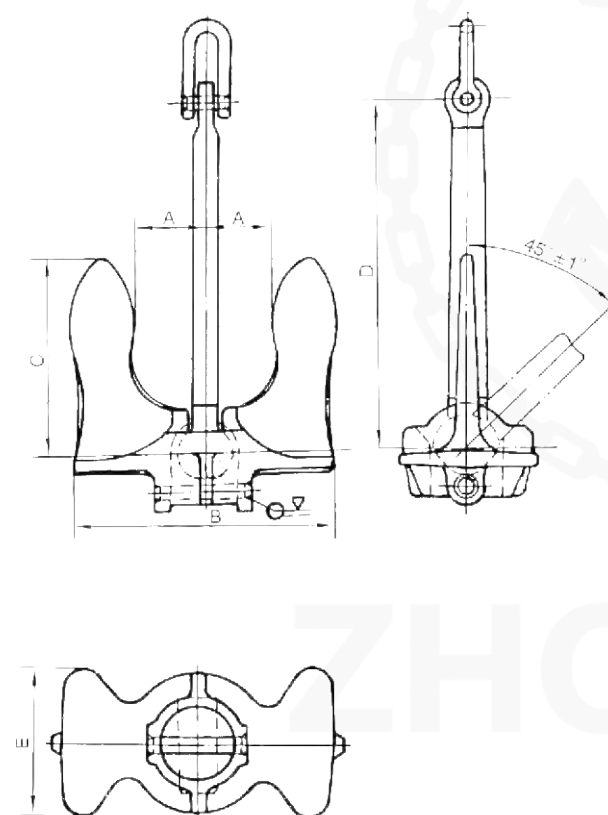

锚的名义重量 NOMINAL WEIGHT kg(L _n)	A	B	C	D	E
23 (50)	82	312	236	420	165
34 (75)	95	358	270	482	190
45 (100)	104	394	298	530	208
68 (150)	120	450	340	606	237
91 (200)	133	457	394	686	241
113 (250)	140	535	404	720	282
136 (300)	170	591	437	813	297
181 (400)	178	654	483	813	330
227 (500)	178	673	508	900	356
284 (625)	192	725	545	900	380
340 (750)	215	732	621	965	418
454 (1000)	248	854	638	1067	457
544 (1200)	250	900	710	1170	470
680 (1500)	280	1016	775	1245	520
780 (1720)	298	1054	844	1320	533
907 (2000)	305	1092	857	1321	559
998 (2200)	308	1137	868	1473	591
1134 (2500)	308	1137	868	1473	591
1361 (3000)	330	1208	914	1626	648
1588 (3500)	362	1340	997	1626	699
1814 (4000)	368	1353	1003	1794	699
2268 (5000)	397	1461	1067	1930	762
2722 (6000)	438	1613	1191	1930	838
3175 (7000)	457	1660	1225	2083	857
3674 (8100)	463	1683	1241	2375	870
4899 (10800)	533	1918	1473	2438	991
5216 (11500)	533	1949	1473	2438	1016
5670 (12500)	533	1949	1473	2438	1016
6895 (15200)	610	2184	1651	2616	1168
7802 (17200)	620	2215	1670	2795	1200
9979 (22000)	660	2438	1829	2845	1295
11340 (25000)	711	2616	1969	3048	1365
13608 (30000)	759	2794	2096	3251	1454
15876 (35000)	800	2946	2210	3429	1524



工艺流程

Process of manufacture



↓ 原材料储存
Bar Material Storage



↓ 下料
Cutting




↓ 棒料加热
Bar Material Heating




编环
Bending



↑ 热处理
Heat Treatment

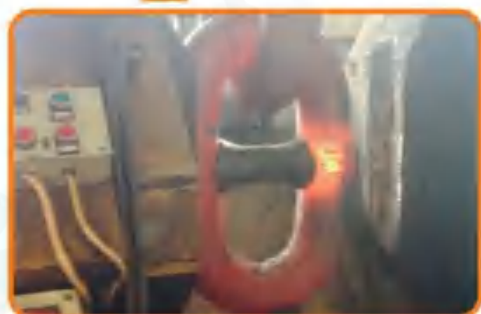

↑ 压档
Stud Setting

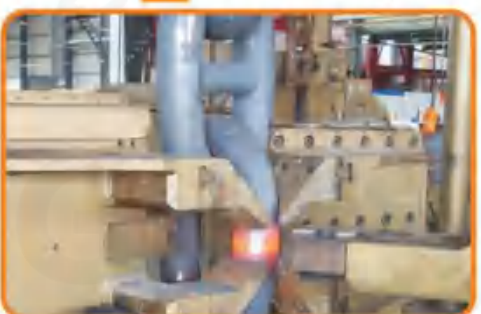

↑ 去刺
Trimming



闪光焊接
Flash Butt Welding



↓ 拉力试验
Proof Test



↓ 拉断试验
Breaking Test



↓ 横档压延 (系泊链)
Stud Expansion (Offshore Mooring Chain)



表面抛丸
Shot Blasting




↑ 系泊链装运
Delivery for Offshore Mooring Chain



↑ 船用锚链装运
Delivery for Ship Anchor Chain



↑ 标识 (系泊链)
Marking (Offshore Mooring Chain)

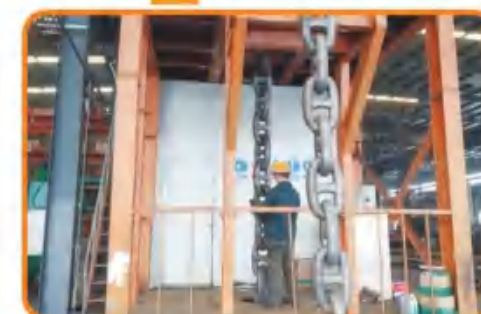

无损探伤 (系泊链)
NDT (Offshore Mooring Chain)





设备与技术

Equipment & Technology



光谱分析仪 Spectrum Analyzer



制链机组 Chain Making Machine Set



制链机组 Chain Making Machine Set



拉力试验机 Proof Test Machine



计算机控制的链链热处理炉 Heat Treatment Furnace Controlled by Computer



金相显微镜 Metallurgical Microscope

品质检测

Quality Inspection



拉伸试验 Tensile Test



尺寸检测 Dimension Inspection



磁粉探伤 MT



超声波探伤 UT



客户验收 Customer Inspection and Acceptance





冲击试验 Impact Test





产品图样 Drawings of Products





KENTER SHACKLE=KS (肯特卸扣)

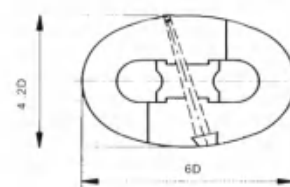



ANCHOR SHACKLE=A.S (末端卸扣)

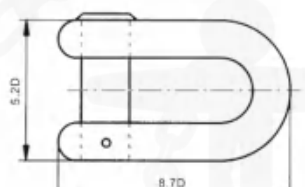



JOINING SHACKLE=JS (连接卸扣)

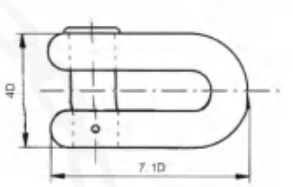

ANCHOR SWIVEL SHACKLE (a)=A.S.W.S (a)
(A型转环卸扣)

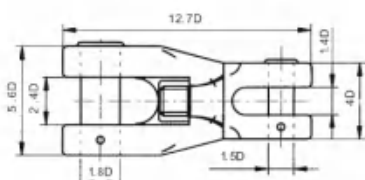

ANCHOR SWIVEL SHACKLE (b)=A.S.W.S (b)
(B型转环卸扣)

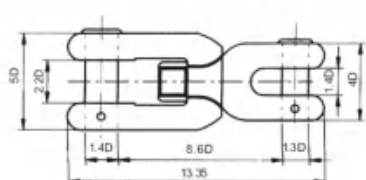

Buoy Shackle
Type "A"





Buoy Shackle
Type "B"





产品图样 Drawings of Products





COMMON LINK=C (普通链环)

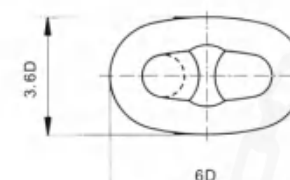



END LINK=E (末端链环)

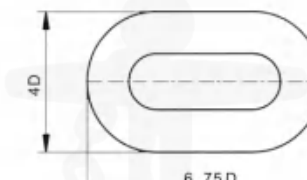



SWIVEL=SW (转环)

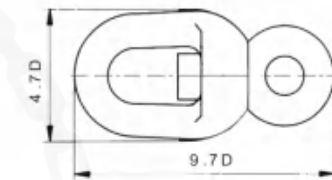

ENLARGED LINK=EL (加大链环)

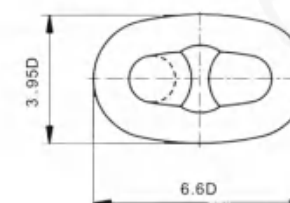

STUDLESS LINK=SL (无档链)

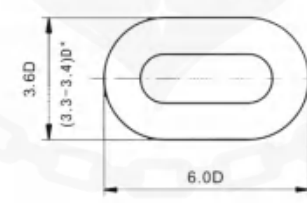

梨形环
Pear Shaped Link



三眼板
Triangle Plate (TP)





圆环
Round Link (RL)





产品图样 Drawings of Products



LTM H-TYPE JOINING SHACKLE = LTM HJS
(LTM H型连接卸扣)

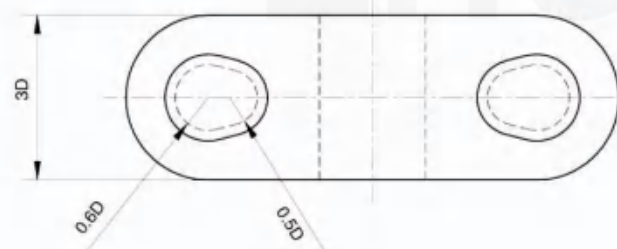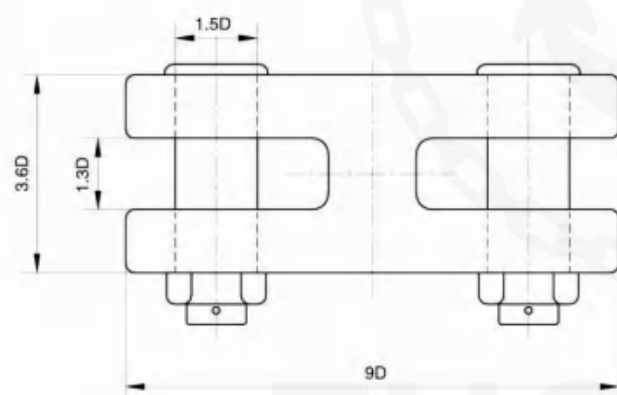

LTM END JOINING SHACKLE = LTM EJS
(LTM 末端连接卸扣)

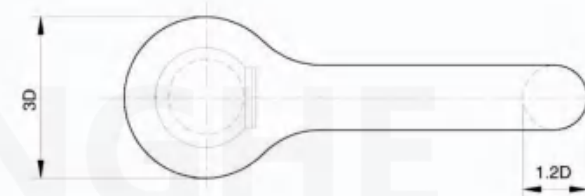
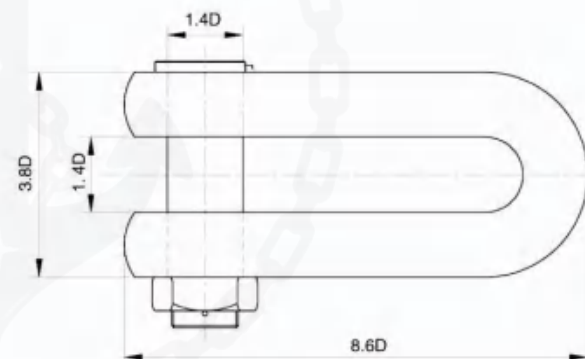


梨形肯特卸扣
Pear Shaped Kenter Shackle





产品图样 Drawings of Products



22CC

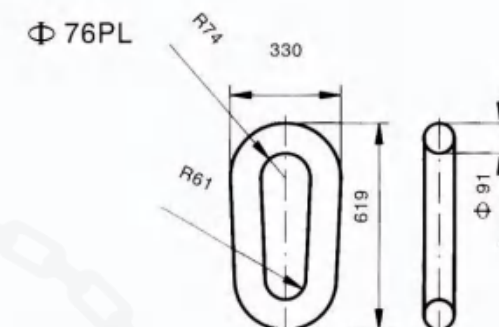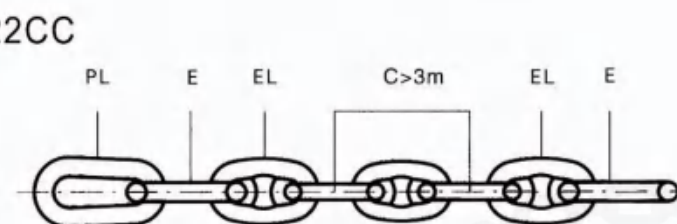


23CC

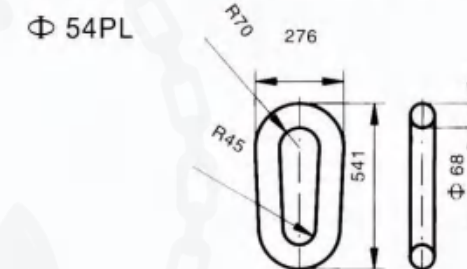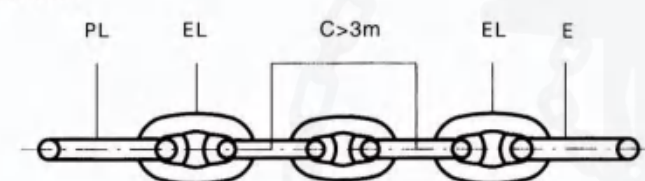


24CC

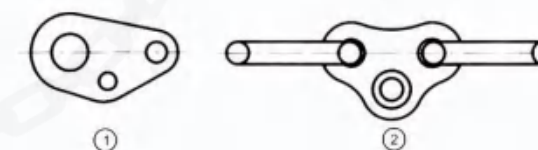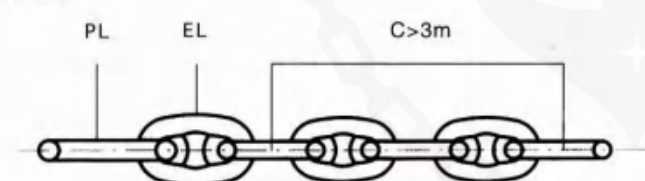

25CC

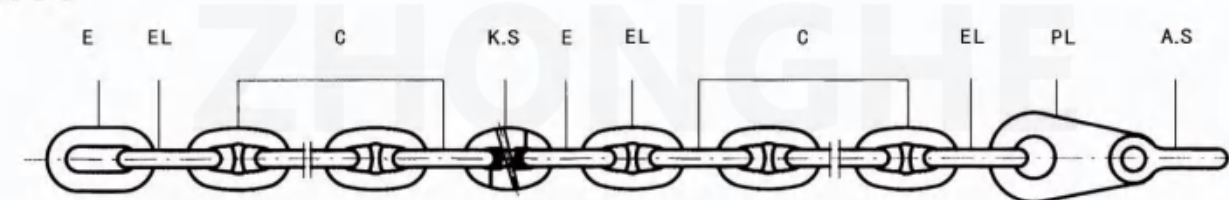


26CC

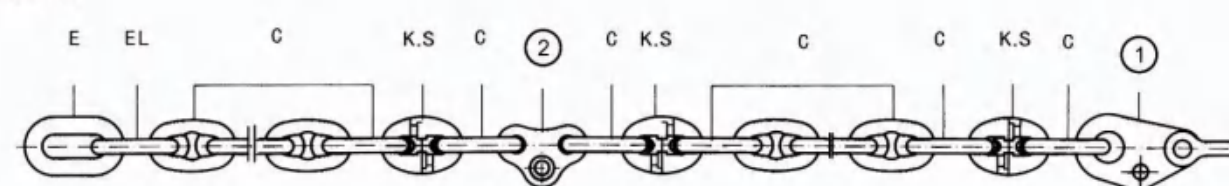


锚链连接形式

Arrangement Of Anchor Chain


01a




02a




03a




04a




05sc




06sc




07sc




08sc




09sc




10sc




11sc




12sc



13sf




14sf



15sf




16sf




17sf




18sf




19ta




20ta



21ta



无档锚链 OPEN LINK ANCHOR CHAIN/STUDLESS ANCHOR CHAIN

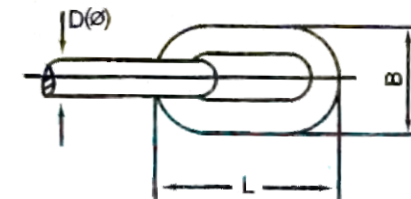



材料 MATERIAL: (U1: CM370; U2: CM490; U3: CM690)

表面 热镀锌 SURFACE: HOT DIP GALVANIZED

无档杆锚链 链环尺寸 (6*3.6D) 试验负荷 重量 OPEN LINK ANCHOR CHAIN/STUDLESS ANCHOR CHAIN, LINK SIZE (6*3.6D), TESTLOAD AND WEIGHT										
链径 D(φ) DIAMETER		链环尺寸 CHAIN LINK SIZE		1 级无档锚链 BM1 U1 OPEN LINK CHAIN		2 级无档锚链 BM2 U2 OPEN LINK CHAIN		3 级无档锚链 BM3 U3 OPEN LINK CHAIN		节重 APPROX. WEIGHT
		外长 L OUTSIDE LENGTH	外宽 B OUTSIDE WIDTH	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	27.5M KG
INCH	MM	MM	MM	KN	KN	KN	KN	KN	KN	KG
1/2	12.5	75	45	28.75	57.81	41.2	82.6	56.4	112.8	85.41
9/16	14	84	50.4	34.78	69.93	51	101.9	70.76	141.51	106.55
5/8	16	96	57.6	47.1	94.72	66.2	132.3	92.94	184.83	139.43
11/16	17.5	105	63	56.35	113.31	78.89	157.78	110.55	221.1	178.35
3/4	19	114	68.4	66.42	133.57	93.6	187.2	130.32	260.64	217.68
13/16	20.5	123	73.8	77.33	155.49	108.64	217.27	151.7	303.42	229.14
7/8	22	132	79.2	89.06	179.08	125.4	250.9	174.4	349.4	264.49
15/16	24	144	86.4	105.98	213.25	149.9	298.9	207.9	415.8	341.82
1-1/16	26	156	93.6	124.38	250.12	175.4	350.8	244	488	369.94
1-1/8	28	168	100.8	144.26	290.08	203.8	406.7	283	566	427.04
1-3/16	30	180	108	165.6	333	234.2	467.5	324.9	649.8	490.98
1-1/4	32	192	115.2	188.42	378.88	265.6	531.2	369.6	739.3	559.65
1-5/16	34	204	122.4	212.7	427.72	299.9	599.8	417.3	834.6	671.52
1-7/16	36	216	129.6	238.46	479.52	336.1	672.3	467.8	935.7	707.85
1-1/2	38	228	136.8	265.7	534.28	374.4	748.7	521.3	1042.5	788.98
1-9/16	40	240	144	294.4	592	414.5	829.1	577.6	1155.2	869.36
1-5/8	42	252	151.2	324.58	652.68	457.7	915.3	636.8	1273.6	959.3
1-3/4	44	264	158.4	356.22	716.32	502.7	999.6	698.9	1398	1111.25
1-13/16	46	276	165.6	389.34	782.92	548.8	1097.6	763.9	1527.8	1152.07
1-7/8	48	288	172.8	423.94	852.48	597.8	1195.6	831.7	1663.5	1256.26
2	50	300	180	460	926.09	648.8	1293.6	902.5	1805	1360.41
2-1/16	52	312	187.2	497.54	1000.5	697.63	1395.3	976.14	1952.28	1485.61
2-1/8	54	324	194.4	536.54	1078.9	752.33	1504.7	1052.68	2105.36	1648.08
2-3/16	56	336	201.6	577.02	1160.3	809.09	1618.2	1132.1	2264.2	1715.97
2-5/16	58	348	208.8	618.98	1244.7	867.91	1735.8	1214.4	2428.8	1844.5
2-3/8	60	360	216	662.4	1332	928.8	1857.6	1299.6	2599.2	1973.29
2-7/16	62	372	223.2	707.3	1422.3	991.75	1983.5	1387.68	2775.36	2101.56
2-1/2	64	384	230.4	753.66	1515.5	1056.8	2113.5	1478.66	2957.32	2298.47
2-9/16	66	396	237.6	801.5	1611.7	1123.9	2247.7	1572.52	3145.04	2398.1
2-11/16	68	408	244.8	850.82	1710.9	1193	2386	1669.26	3338.52	2522.88
2-3/4	70	420	252	901.6	1813	1264.2	2528.4	1768.9	3537.8	2697.65



有档锚链 STUD LINK ANCHOR CHAIN

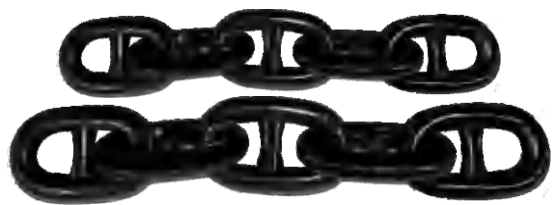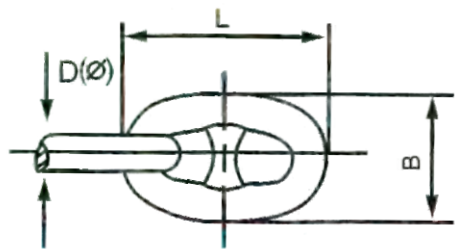

表面 SURFACE:
黑漆 BLACK PAINTED

材料 MATERIAL: (U1: CM370; U2: CM490; U3: CM690)


有档锚链 链环尺寸 (6*3.6D) 试验负荷 重量 STUD LINK ANCHOR CHAIN, LINK SIZE (6*3.6D), TESTLOAD AND WEIGHT										
链径 D(φ) DIAMETER		链环尺寸 CHAIN LINK SIZE		1 级有档锚链 AM1 U1STUDLINK CHAIN		2 级有档锚链 AM2 U2STUDLINKCHAIN		3 级有档锚链 AM3 U3STUDLINK CHAIN		节重 APPROX. WEIGHT
		外长 L OUTSIDE LENGTH	外宽 B OUTSIDE WIDTH	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	拉力负荷 PROOF LOAD	破断负荷 BREAKING LOAD	27.5M KG
INCH	MM	MM	MM	KN	KN	KN	KN	KN	KN	
	12.5	75	45	46	66	66	92	92	132	98
	14	84	50	58	82	82	116	116	165	119
	16	96	58	76	107	107	150	150	216	156
	17.5	105	63	89	127	127	179	179	256	186
	19	114	68	105	150	150	211	211	301	230
	20.5	123	74	123	175	175	244	244	349	260
	22	132	79	140	200	200	280	280	401	300
	24	144	86	167	237	237	332	332	476	370
	26	156	94	194	278	278	389	389	556	431
	28	168	101	225	321	321	449	449	642	496
	30	180	108	257	368	368	514	514	735	564
	32	192	115	291	417	417	583	583	833	635
	34	204	122	328	458	468	655	655	937	712
	36	216	130	366	523	523	732	732	1050	800
	38	228	137	406	581	581	812	812	1160	887
	40	240	144	448	640	640	896	896	1280	1032
	42	252	151	492	703	703	891	891	1400	1084
	44	264	158	538	769	769	1080	1080	1540	1197
	46	276	166	585	837	837	1170	1170	1680	1310
	48	288	173	635	908	908	1270	1270	1810	1438
	50	300	180	686	981	981	1370	1370	1960	1546
	52	312	187	739	1060	1060	1480	1480	2110	1661
	54	324	194	794	1140	1140	1590	1590	2270	1791
	56	336	202	851	1220	1220	1710	1710	2430	1926
	58	348	209	909	1290	1290	1810	1810	2600	2086
	60	360	216	969	1380	1380	1940	1940	2770	2249
	62	372	223	1030	1470	1470	2060	2060	2940	2361
	64	384	230	1100	1560	1560	2190	2190	3130	2516
	66	396	238	1160	1660	1660	2310	2310	3300	2676
	68	408	245	1230	1750	1750	2450	2450	3500	2885
	70	420	252	1290	1840	1840	2580	2580	3690	3010

船


船舶附件产品
MARINE FITTINGS




DIN型导缆孔 TYPE DIN CHOCKS (DIN 81915)

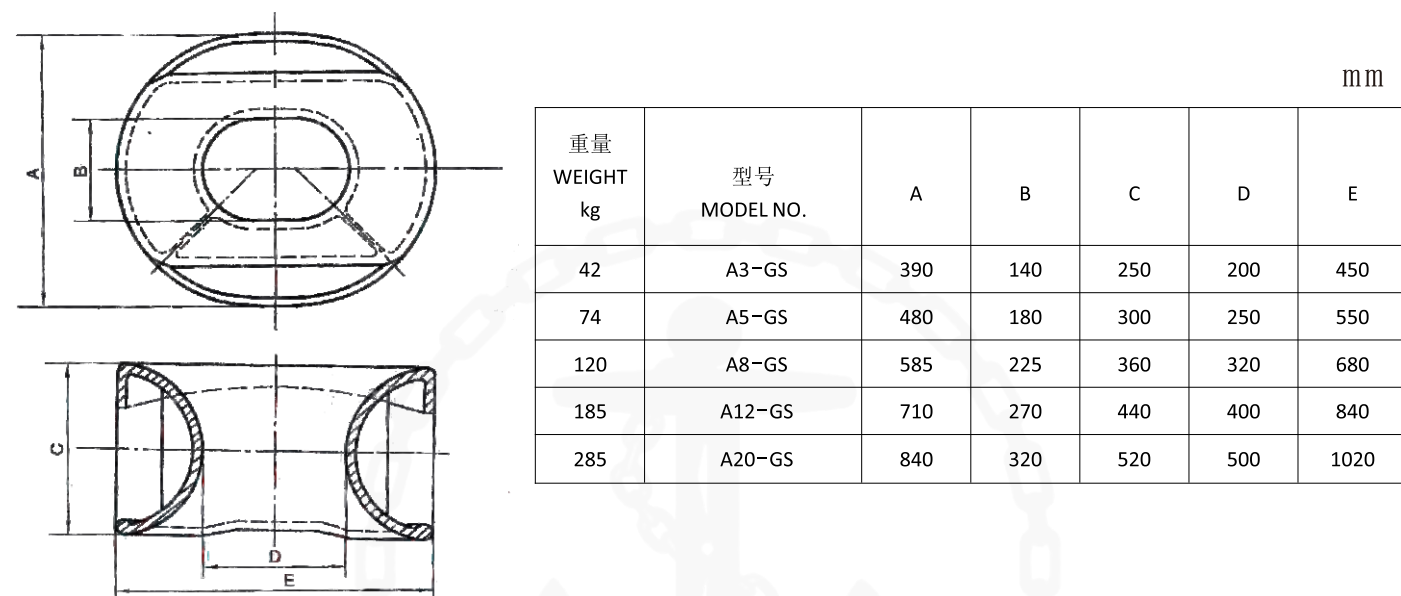


U. S. 型巴拿马导缆孔 TYPE U. S. PANAMA CHOCKS

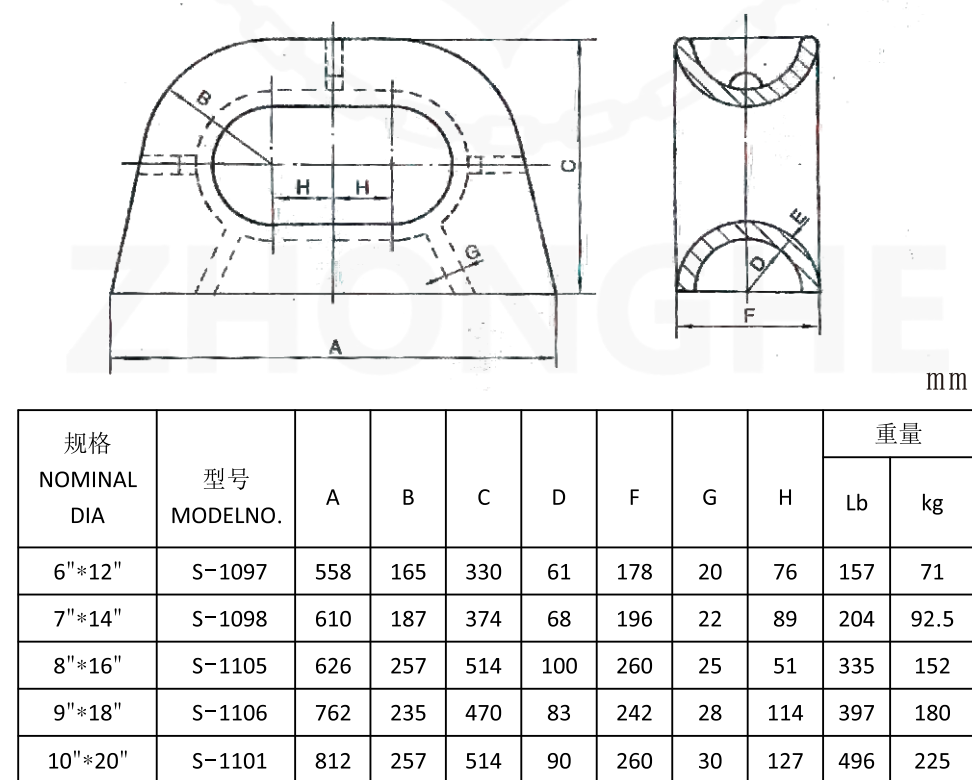




闭式导缆式 JIS F 2005-1975 CLOSED CHOCKS

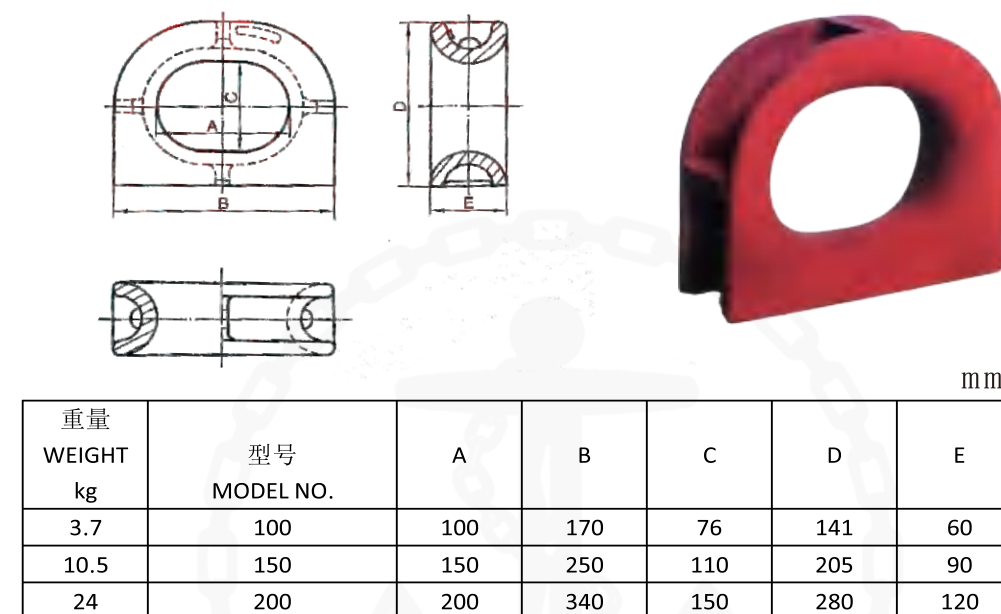


系泊式导缆孔 (A型) JIS F 2007-1976 MOORING CHOCK (A)

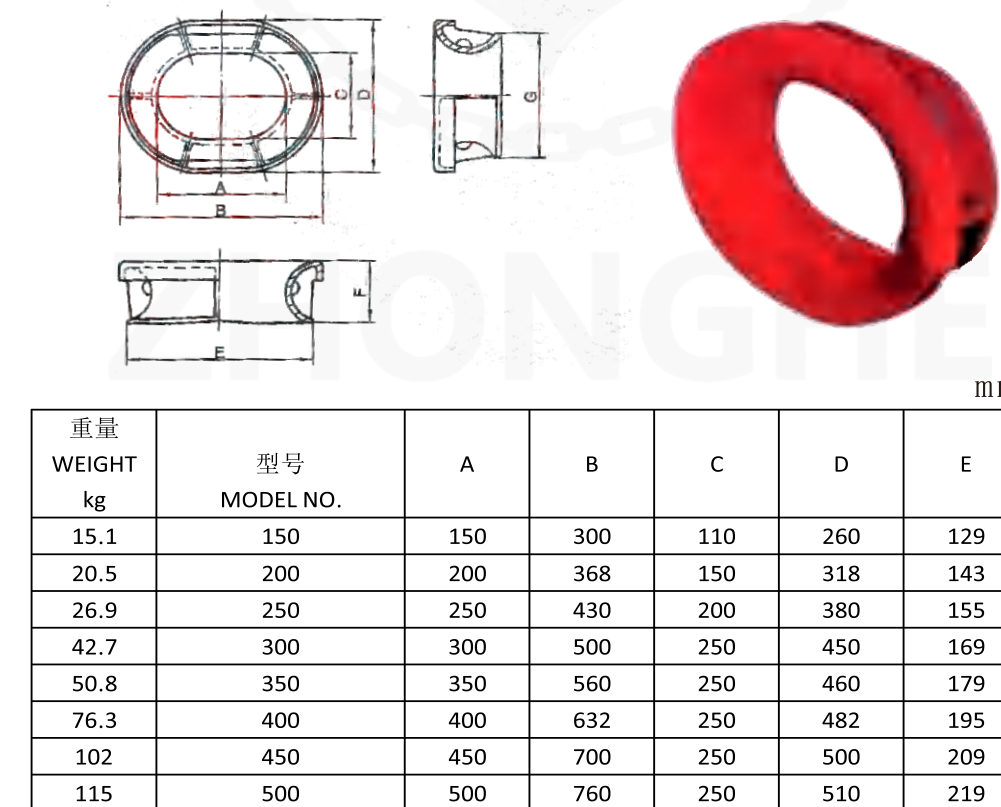

西班牙导缆孔

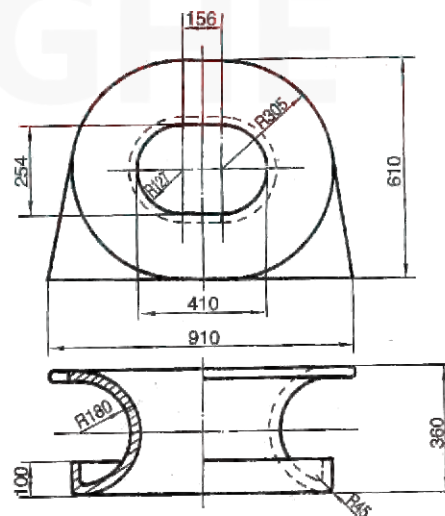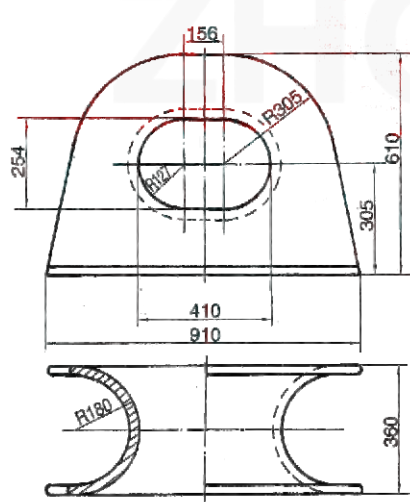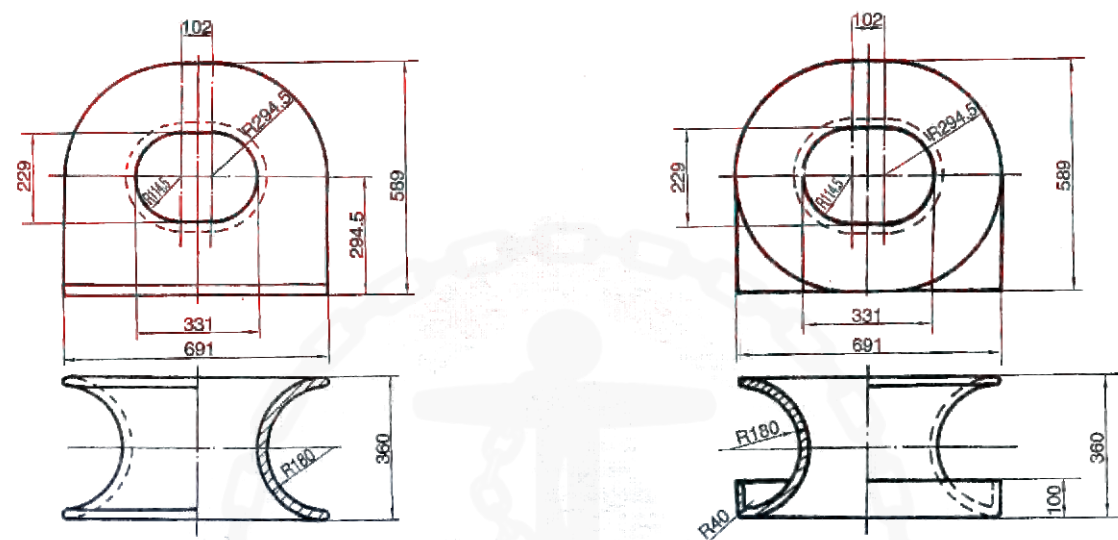


巴拿马导缆孔（AC型） JIS F 2017-1982 PANAMA CHOCKS (AC)

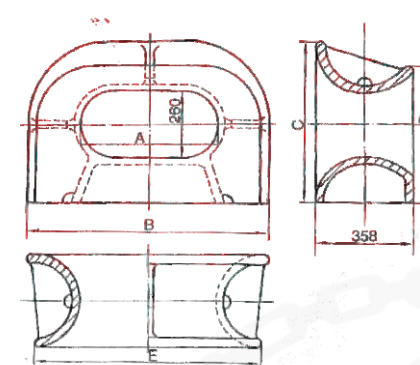


重量 WEIGHT kg	型号 MODEL NO.	A	B	C	D	E
253	310	310	708	639	541	652
289	360	360	760	640	542	704
323	400	400	804	642	545	750
351	450	450	856	643	547	802
395	500	500	908	644	549	854

巴拿马导缆孔（BC型） JIS F 2017-1982 PANAMA CHOCKS (BC)

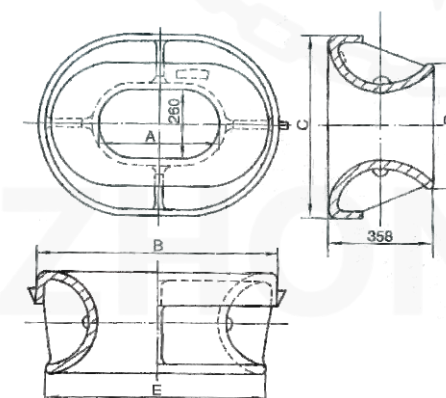


重量 WEIGHT kg	型号 MODEL NO.	A	B	C	D	E
276	310	310	734	684	462	652
305	360	360	788	688	464	704
344	400	400	832	692	470	750
385	450	450	886	696	474	802
422	500	500	940	700	478	854


单点式导缆孔 (A) 型 JIS F 2030-1978 SINGLE POINT MOORING PIPES (A)

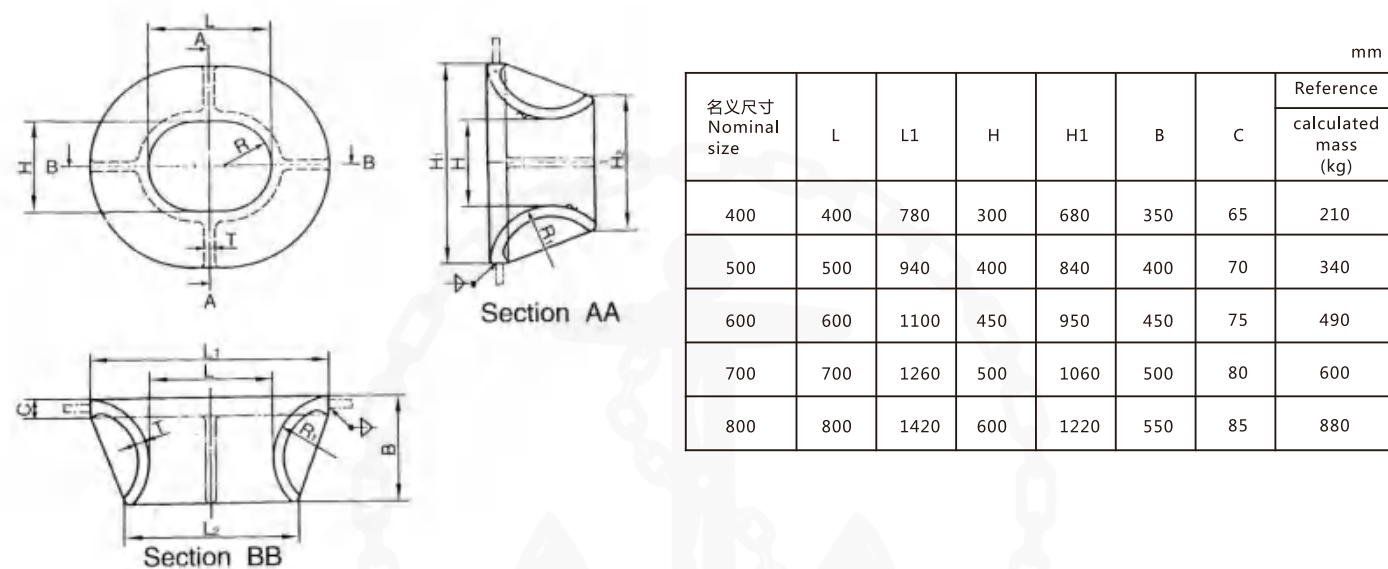

单点式导缆孔 (B) 型 JIS F 2030-1978 SINGLE POINT MOORING PIPES (B)

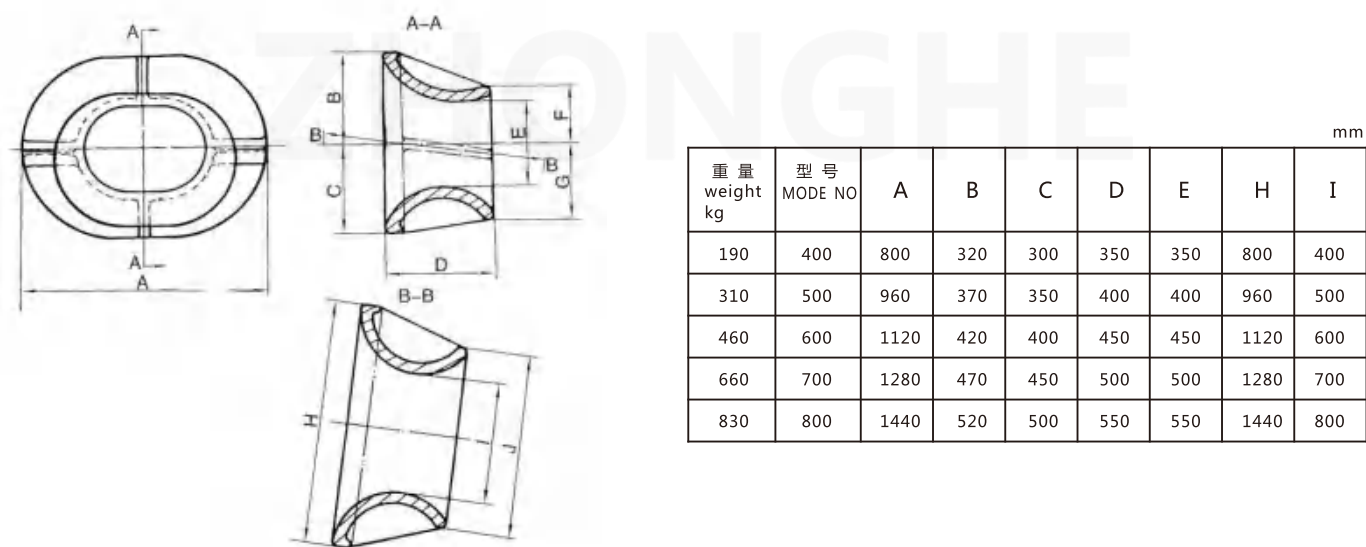


船用小型制链器 JIS F 2023-1976 SHIP'S SMALL SIZE CAST STEEL BAR TYPE ANCHOR CHAIN CABLE STOPPERS

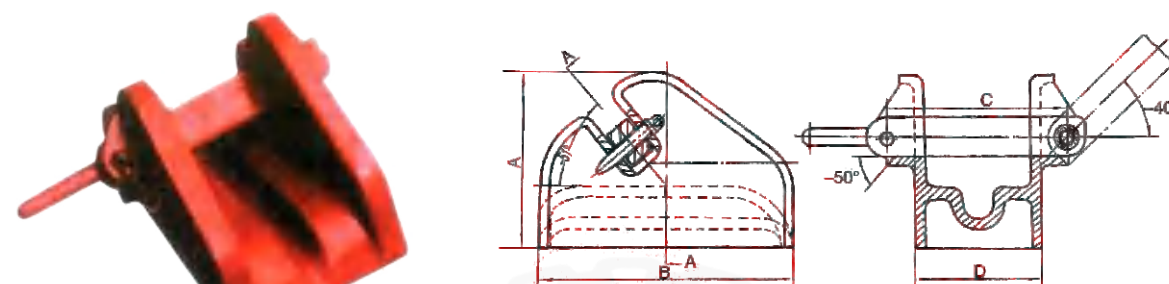

名义编号 NOMINAL NO	19	22	25	28	32	36
适用的锚链直径 NOMINAL DIA.OF ANCHOR CHAIN	17-19	20-22	23-25	26-28	29-32	34-36
A	190	216	241	270	305	342
B	270	310	345	385	435	490
C	200	226	256	280	320	154
D	134	153	175	193	220	246
重量 WEIGHT(kg)	17	24	33	44	68	92

铸钢锁杆型制链器 JIS F 2015-1987 CAST STEEL BAR TYPE CHAIN CABLE STOPPERS

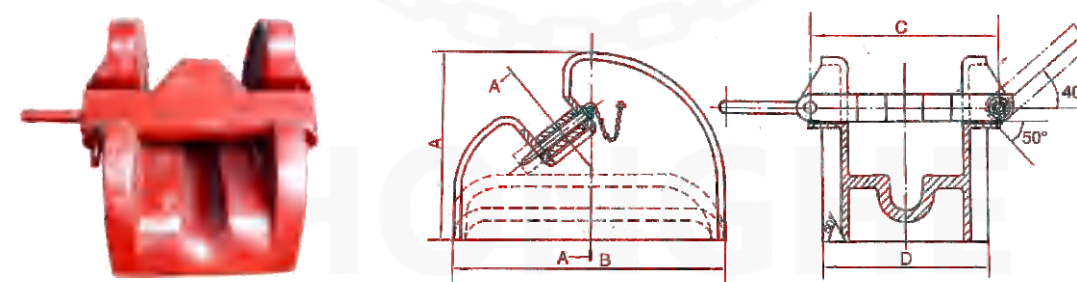

名义编号 NOMINAL NO	40	44	48	52	56	60	64	68	73	78
适用的锚链直径 NOMINAL DIA.OF ANCHOR CHAIN	38-40	42-44	46-48	50-52	54-56	58-60	62-64	66-68	70-73	76-78
A	378	412	450	491	528	564	600	635	675	715
B	540	590	640	695	745	795	850	900	960	1020
C	390	424	460	494	530	564	600	636	678	720
D	336	366	397	428	457	488	517	547	582	617
重量 WEIGHT(kg)	111	139	176	216	261	319	380	452	561	682



船舶舾装件 >> MARINE OUTFITTERS



船舶舾装件 >> MARINE OUTFITTERS





船舶舾装件 >> MARINE OUTFITTINGS



拖航导缆器
Towing fairlead



气控弹簧拖钩
Towing hook with spring by pneumatic control



无弹簧拖钩
Towing hook without spring



弹簧拖钩
Towing hook with spring



索具螺旋扣
Rigging screw



钢索开口滑车
Notch block of cable



锚唇
Anchor mouth



船用眼环
Eye rings for ship



拖力三角眼板
Towing triangle eye-plate



系泊纤维索卷车
Mooring cordage reel



船用钢索卷车
Marine steel wire reel



鹅颈式通风筒
Gooseneck Ventilator



菌式通风筒
Mushroom Ventilator



200T系船柱
200T bollard



100T系船柱
100T bollard



125T系船柱
125T bollard



吊锚杆
Anchor davit



A型掣锚索
A-type chain fix



B型掣锚器
B-type chain fix



滚轮闸刀
Roller-type cable stopper



水平滚柱导缆器
Fairlead with horizontal roller



万向导缆器
Universal fairlead



水平滚轮导缆器
Fairlead with horizontal roller



德式导缆器
Germany-style fairlead



A型工程船导缆器
A-type fairlead for engineering ships



B型工程船导缆器
B-type fairlead for engineering ships



二滚柱导缆器
Double-roller fairlead



带座滚柱导缆器
Roller fairlead with base



A型三滚柱导缆器
A-type trinal-roller fairlead



B型四滚柱导缆器
B-type four-roller fairlead



BB型闭式滚柱导缆器
BB-type closed roller fairlead



BA型开式滚柱导缆器
BA-type open roller fairlead



C型五滚柱导缆器
C-type five-roller fairlead



C型五滚柱导缆器
C-type five-roller fairlead



D型六滚柱导缆器
D-type six-roller fairlead



E型九滚柱导缆器
E-type nine-roller fairlead



异型多滚柱导缆器
Metatypical multi-roller fairlead



圣劳伦斯导缆器
Fairlead for St. Lawrence Seaway



圣劳伦斯导缆器
Fairlead for St. Lawrence Seaway



斜式导缆器
Titled-type fairlead



异型导缆器
Metatypical fairlead



日式导缆器
Japanese-style fairlead



美式导缆器
American-style fairlead



异型三滚柱导缆器
Metatypical trinal-roller fairlead



船舶舾装件 >>

MARINE OUTFITTINGS



A型螺旋掣链器
A-type screw chain stopper



B型螺旋制链器
B-type screw chain stopper



闸刀掣链器
Lever chain stopper



简易弃锚器
Simple anchor released



围船掣链器
Pontoon chain stopper



停泊掣链器
Anchor chain stopper



插门弃锚器
Plug type anchor released



插门弃锚器
Plug type anchor released



滚轮铡刀掣链器
roller wheel straw chopper chain stopper



导链滚轮
Chain cable fairlead



A型锚链舱眼环
A-type chain locker ring plate



B型锚链舱眼环
B-type chain locker ring plate



螺旋弃锚器
Screw anchor released



锚浮标
Anchor buoy



斜式带缆桩
Tilted-type bollard




E型双十字带缆桩
E-type double cruciform bollard



D型单十字带缆桩
D-type single cruciform bollard



A型带缆桩
A-type bollard



带耳缆桩
Eared bollard



通风缆桩
Ventilation bollard



锚链管
Chain pipe



掣链钩
Chain stopper hook



单点系泊掣链器
Singlepoint mooring chain stopper



水密螺旋弃锚器
Watertight screw anchor released



斜楔滑动式掣钢索器
Wedge sliding-type wire stopper